





















PROTECT YOURSELF AT WORK



Our Mission

NAUTILUS®, NTLS®, 4SITE®, understanding of the critical STURDY®, STDY®, ROCK™ and TORO™ Brand Workwear and Safety Apparel puts safety first because we understand that there is no such thing as being "too safe". In designing safety products, the Nautilus Group philosophy recognizes that workwear, and especially safety wear, can sometimes be cumbersome and restrict one's freedom of movement. Our products are designed with a focus on wearer comfort in both, static and dynamic modes.

Helmets, spectacles and masks take the panorama of vision into account and strive to provide the maximum visibility. Harnesses are designed with an

points of stress encountered during suspension, as well as the jerk points that get super-stressed in the event of fall arrest. This allows the wearer to not only 'sit' in his harness comfortably, but also suffer the least contusion in a fall arrest, should he fall. Similarly great attention is paid to the material used, to give it as much strength as possible, even beyond the minimum regulated norm, and yet provide comfort and avoid chafing. Coveralls are bar tacked at stress points and doublestitched to withstand heavy

Equal importance is paid to ecological needs. The best


ecologically conscious dyes are used. While only virgin (new) raw materials are used, they are chosen keeping in mind their ability to be recycled. Shoes and fitted apparel are ergonomically designed to give the wearer both support and comfort, always keeping your SAFETY uppermost in mind.

Fire Safe Apparel covers the latest range of fabrics and accessories from chemically treated cotton fabric to intrinsically flame resistant aramid fabric.

Our range of products includes First Aid Kits, Emergency Shower and Eyewash Stations.


































Contents

Head Protection	1
Respiratory Protection	2-4
Hearing Protection	4
Helmets & Accessories	4
Eye / Face Protection	5-8
Eye Flush / Safety Showers	9-11
First Aid Kit	11
Fall Protection	12-14
Foot Protection	15-18
Fire Protection	18
Fire + Heat Protection	19
Workwear	20
Winter Gear	21-22
Welding Protection	23-24
Chemical Protection	25
Hi Vis Clothing	26
Hand Protection	27-28
Safety Sign	28
Marine Spares	28
Road Safety	29
Marine Safety	30
Rescue	31-32
Spill Kit	33-35
Spill Pallets	36
Sorbents	37-38
Lockout Tagout (LOTO)	39-42
Safety Training & Loto Survey	43



STURDY HEAVY DUTY SAFETY HELMET

Model No.: STDY 904

Description:

- · General purpose safety helmet with 4 point PE suspension.
- · Terylene cradle and brushed nylon sweatband
- · High density impact resistant PP cap.
- · Safety helmet with side slot adaptors (30mm) for attaching earmuffs or visors
- · With adjustable chin strap
- · With buckle adjustment
- · Chin strap releases at minimum 150N and maximum 250N
- Conforms to EN 397: 2012 + A1: 2012 Type I, Class G

Color Options:

· Light Blue, Grey, Green, Red, White, Yellow, Orange, Royal Blue

Origin: China



NAUTILUS ABS HELMET

Model No.: NTLS 902R ABS

Description:

- · This design features a strong mid comb with 'bean curd' design vents on the sides for ventilation in hot climates. The design facilitates the use of face shields and sound attenuation devices (ear muffs) in readymade slots. The suspension is adjustable for the user to adjust the height and fit. Model 902R is fitted with a ratchet suspension wheel of very superior design which alleviates the need for removal of the helmet for adjustment. High density impact resistant ABS cap.
- Conforms to EN 397: 2012 + A1: 2012; ANSI/ISEA Z89.1-2014 (R2019); AS/NZS 1801: 1997

Color Options:

· Light Blue, Grey, Green, Red, White, Yellow, Orange, Royal Blue

Origin: China

STURDY SPORTS WORKING BUMP CAP

Model No.: STDY 913

Description:

- · Working bump cap
- · Insert with high quality plastic shell provide good protection, additional soft EVA pad has shock absorb function.
- · Logo printing and embroidery are available as optional.
- Conforms to EN 812: 2012

Color Options:

· Standard Color: Navy Blue, Black

Origin: Taiwan

STURDY HIGH IMPACT RESISTANT WELDING HELMET

Model No.: STDY 760

Description:

- · Beautiful design and full range protection.
- High impact resistant PP shell, with headgear H-71A.
- · Lift up window style, size: 2 inch x 41/4 inch
- Conforms to EN175: 1997 Z87.1-2003

Color: Black Origin: Taiwan



STURDY HEAVY DUTY SAFETY HELMET WITH RATCHET

Model No.: STDY 904R

Description:

- · General purpose safety helmet with 4 point webbing suspension
- · High density impact resistant PP cap.
- Safety helmet with side slot adaptors (30mm) for attaching earmuffs or visors
- · Smooth ratchet for adjustable fitting
- · Adjustable chin strap with buckle
- Chin strap releases at minimum 150N and maximum 250N
- Conforms to EN 397: 2012 + A1: 2012 Type I, Class G

Color Options:

· Light Blue, Grey, Green, Red, White, Yellow, Orange, Royal Blue

Origin: China



STURDY VENTILATED HELMET

Model No.: STDY 906

Description:

- · This design features a strong mid comb with 'bean curd' design vents on the sides for ventilation in hot climates. The design facilitates the use of face shields and sound attenuation devices (ear muffs) in readymade slots. The suspension is adjustable for the user to adjust the height and fit. Model 906 is fitted with a press button type buckle for ease of adjustment of the suspension band without removing the helmet. High density impact resistant PP cap.
- Conforms to EN 397: 2012 + A1: 2012

Color Options:

· Orange, White, Dark Blue; Light Blue, Green, Yellow, Red

Origin: China



STURDY SAFETY HELMET LIGHT DUTY BUMP CAP

Model No.: STDY 903

Description:

- · Super lightweight PE cap, with CS-3 PE suspension.
- · Economic and portable size
- Great ventilation design for all day wearing and protection.
- Recommend for above general head protection, including industrial, factory, agriculture, mining...etc.
- Conforms to EN 812: 2012

Color Options:

· Standard Color: White, Red, Blue, Yellow

Origin: Taiwan

STURDY HANDY WELDING VISOR

Model No.: STDY 703

Description:

- Economic, handy welding visor
- PP shell, handle outside
- Fixed window, size: 2 inch x 41/4 inch
- Lens excluded
- Conforms to EN175: 1997 Z87.1-2003


Origin: Taiwan



STURDY CLIP CAP WELDING HELMET

Model No.: STDY 770 **Description:**





Conforms to EN175: 1997 Z87.1-2003

Color: Black Origin: Taiwan



NAUTILUS HALF MASK

Model No.: NTLS 0503E

Description:

- · The main body of the mask is made of high quality silicone which is anti-aging; anti-allergenic; easy to clean and comfortable to wear.
- · Contour of the mask is designed to fit the facial curve and is easily adjustable to ensure a good seal
- The half mask provides an unrestricted field of vision
- · Well designed inhalation and exhalation valves provide low breathing resistance.
- · Adjustable head bands ensure a secure seal around the face.
- Twin filters provide double the area of filtration and less breathing resistance.
- · External screw thread connections facilitate filter replacement.
- Conforms to CE EN 140: 1998

Origin: China



NAUTILUS FLAT FOLD STYLE RESPIRATOR

Model No.: NTLS 420 SLV FFP2

Description:

- · Filter Efficiency: FFP2 (above 94% filter efficiency)
- · Use for : Solid particles & non-oil based liquid particles from spray - tested for mean solid particle size 0.6 microns and mean liquid non-oil spray particles of 0.4 microns.
- Style: Flat fold style allows convenient storage and portability before usage
- Fitting: Special skin-friendly elastic with adjustable beads for proper fit with
- No Puncture: Elastic sewed outside sealing area for better filtration without puncture
- Colours Available: White
- CE certified, Complies EC type test requirement based on EN 149: 2001+A1: 2009 by European notified body, CIOP (1437) Poland.
- Certified by Central Labour Institute (CLI). Meets specifications for class FFP2 to the standards. Prescribed by BIS 9473-2002 in respect of Breathing resistance and filtration penetration tests.

Origin: India

NAUTILUS FULL FACE MASK

Model No.: NTLS 1011A + 0503 P3R/07B

Description:

- . The main body of the mask is made of high quality silicone which is anti-aging; anti-allergenic; easy to clean and comfortable
- Contour of the mask is designed to fit the facial curve and is easily adjustable to ensure a good seal
- The extra wide PC window provides a panoramic field of vision
- The Window is anti-fog coated on the inside and Hard coated on the outside for scratch resistance
- Well designed inhalation and exhalation valves provide low breathing resistance.
- Adjustable head bands ensure a secure seal around the face.
- Twin filters provide double the area of filtration and less breathing resistance.
- · External screw thread connections facilitate filter replacement.
- · Conforms to CE EN 140: 1998 GB2890-2009 standards

Origin: China

NAUTILUS FLAT FOLD STYLE RESPIRATOR

Model No.: NTLS 430 SLV FFP3

Description:

- Color: Normally grey but can be white or assorted
- Construction: Combination of assorted Fibre Sizes of Polypropylene and Polyester fabrics
- Breathing Resistance: 24 mm of water column
- Filtering Efficiency: Filters > 99% of solid and Liquid particles FFP3 assigned protection factor = $50 \times OEL$ Nominal Protection Factor = 50 x OEL
- CE certified, Complies EC type test requirement based on EN 149: 2001+A1: 2009 by European notified body, CIOP (1437) Poland.

Protection:

Aluminium, Antimony, Arsenic, Asbestos Fibres, Barium soluble compounds, Bauxite, Cadmium, Limestone, Chrome, Coal, Fluoride Dust, Gypsum, Graphite, Iron Ore, Lead welding fumes, Magnesium Oxide, Manganese, Molybdenum, Nickel, Paint Mist, Fibers, Glass Metal Dust, Silica, Wood dust, Zinc, etc.

Origin: India

STURDY FLAT FOLD STYLE RESPIRATOR

Model No.: STDY S 44 SL FFP1

Description:


- Filter Efficiency: FFP1 (above 80% filter efficiency)
- · Use for: Solid particles & non-oil based liquid particles from spray tested for mean solid particle size 0.6 microns and mean liquid non-oil spray particles of 0.4 microns
- · Style: Flat fold style allows convenient storage and portability before usage.
- Fitting: Special skin-friendly elastic for proper fit with comfort
- No Puncture: Elastic sewed outside sealing area for better filtration without puncture.
- · Colour Available: Grey
- CE certified, Complies EC type test requirement based on EN 149: 2001+A1: 2009 by European notified body, CIOP (1437) Poland.
- · Certified by Central Labour Institute (CLI). Meets specifications for class FFP1 to the standards. Prescribed by BIS 9473-2002 in respect of Breathing resistance and filtration penetration tests.

Origin: India





MARTINDALE - FRESH AIR SYSTEM

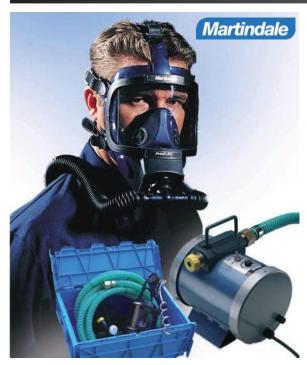

Model No.: MARTINDALE FRESH AIR SYSTEM POWERED M26/300

Description:

- The Martindale Fresh Air System is a simple respiratory protective system for use in "Confined spaces".
- The simplicity of the system allows safe operations in potentially oxygen deficient hazardous areas.
- Breathing Air from an external uncontaminated source is supplied through a hose by an electrically operated turbine pump.

Features:

- The system is versatile, rugged, and light weight and is very easily deployed
- The system is fully contained in its own heavy duty plastic storage case which allows easy transport and prevents damage when the system is not in use
- The unpowered system is supplied with a 9 metre hose but can also be used with a 10 or 20 metre hose
- The system does not use or require any form of filter (except in the turbine)
- . The use of a soft Silicone Full Mask ensures the comfort of the user
- Full Face Mask has plastic rather than metal head harness clips for improved corrosion resistance
- The Mini Turbine is of a rugged steel construction which is IP54 rated. (The Turbine is not Intrinsically Safe, so should not be used in a potentially explosive atmosphere)
- The Mini Turbine is capable of supplying two people up to 40 metres away
- · The Mini Turbine air reduces fatigue and gives added comfort for extended use.
- · Conforms to EN 138 Class 2; Mask EN 136

Origin: UK

MARTINDALE - MAGNUM POWER UNIT

Model No.: MAGNUM POWER UNIT (OPEN AIR)

Description:

 The Magnum Powered System offers a range of power units and head pieces to suit most working environments (there are power units: 1000, 2000 & 8500 with range of head pieces).

Features

- · Compact and light weight, approximate 1 kg including battery for user comfort
- Powerful delivery of up to 180 liters of filtered air per minute
- · Wide range of head pieces to suit working needs
- Light weight NiMH batteries with the benefit of 'no memory effect' providing typically approximately 8 hours usage
- Magnum 1000 and 2000 P2 power units incorporating highly efficient, easy change filter cassettes for improved convenience and performance
- · Easy change battery for on or off the unit for greater ease and convenience.
- Conforms to EN 166 1B / EN 397

Origin: UK



MARTINDALE - AIRFORCE COMPRESSED AIR SYSTEM



Model No.: AIRFORCE COMPRESSED AIR SYSTEM

Description :

- The Martindale Airforce Compressed Air System is designed to provide users with a high level of respiratory and facial protection with maximum user comfort.
- Common applications including paint spraying, particularly isocyanate 2-pack paints, welding or working
 in areas of excessive fumes. The low cost of running and maintenance makes Airforce a highly
 cost-effective system. It is particularly useful in areas of high concentration of chemicals, where charcoal
 filters would quickly be saturated if the alternative negative pressure or powered respiratory systems were
 used with conventional filters. The Airforce system provides efficient air filtration.

Features

- Designed for use with the range of Airforce Compressed Air and Magnum powered headpieces
- Includes an auxiliary accessory outlet for use with spray-guns and other tools
- Features a small low pressure audible warning whistle to warn of insufficient airflow
- The belt-mounted regulator unit is lightweight, extremely compact and ensures high user acceptance.
- Conforms to EN 1835 : 2000

Origin: UK



AERIS COMFORT TYPE 2 SELF-CONTAINED BREATHING APPARATUS

Description:

- Non-metallic, ergonomic, flexible back plate
- Three carry handles and attachment point for lifeline
- Comfort cushions on the shoulders and waist belt straps made of aramid fibre
- Excellent weight distribution of the apparatus on the hips
- Large adjustable fast-tightening shoulder straps buckles
- Washable harness

Specifications:

- Weight (back plate, harness & Zenith demand valve): 3.50 kg
- High-pressure pneumatic gauge: 0-400 bar, photo-luminescent gauge, rubber protection and integrated alarm whistle
- Alarm activation : 55 ± 5 bar
- Alarm volume: > 90 dBA
- Approved temperature : -30°C/+60°C
- Apparatus type approvals: EN 137: 2006 Type 2, SOLAS, MED, IMO, MSC, ISO
- Full face mask type approval: EN 136 Class III+

Origin: France

HONEYWELL BIO-S-CAPE COMPOSITE SCBA - 15 MINUTES

Description:

- Adjustable hood for all face shapes and accommodates all types of facial hair and spectacles
- Wide-angle lens without optical distortion
- Reduced weight composite cylinder
- Improved visibility and reduced internal reflections at the visor to a dark inner surface to the hood
- Reducer triggered automatically when the bag is opened
- Back of the head cushion inflates automatically to keep hood in place
- Recharging port (EN): allowing the apparatus to be refilled after use
- Gauge visible at all times: easy to check pressure during storage inspection and escape
- Powerful alarm whistle to indicate end of operation and non-metallic: positioned next to the ear and does not consume air (air re-injecting into the hood)
- Durable PVC carrying bag with a cylinder securing system
- Cylinder made of light weight composite carbon fiber
- EN 1146: 2005, ISO 23269-1: 2008, SOLAS, MED, IMO, MSC

Origin: USA

HEARING PROTECTION

STURDY UNCORDED PU FOAM EAR PLUGS

Model No.: STDY 03 **Description:**

- SNR: 37 dB · Soft polyurethane foam
- · Conical shape for easy insertion PVC free
- Conforms to EN 352-2: 2002

Color : Orange Origin: Taiwan



STURDY EAR MUFF HEAD BAND

Model No.: STDY EP107

Description:

- · Material: POM headband, HIPS cup and soft PVC cushions
- NRR: 34 dB • SNR: 30 dB
- · Conforms to EN 352-1: 2002

Color: Red Origin: Taiwan



STURDY CORDED PU FOAM EAR PLUGS Model No.: STDY 03C

Description:

- SNR: 37 dB · Corded PU foam ear plug
- Preventing plugs · Conical shape for easy insertion from accident falling
- Conforms to EN 352-2: 2002

Color: Orange Origin: Taiwan



STURDY EAR MUFF HELMET ATTACHABLE

Model No.: STDY EP167

Description:

- · Material: POM headband, HIPS cup and soft PVC cushions
- NRR: 22 dB SNR: 25.9 dB
- Conforms to EN 352-1: 2002

Color: Red Origin: Taiwan



HELMETS & ACCESSORIES

STURDY HEADGEAR FOR VISOR

Model No.: STDY 85A

Description:

- · Impact Resistant PP brow protector offers excellent protection
- · Specially designed adjustable choke hinge
- · Supports every kind of visor
- Conforms to EN 397: 2000 ANSI Z89.1: 2014

Origin: Taiwan



Model No.: STDY 904R + H-86 + FC45 Clear + STDY 167

Description:

- Helmet STDY 904R with visor holder H-86 with Earmuff STDY 167 with PC visor FC45 Clear
- Conforms to CE EN397: 2000

Origin: China / Taiwan





STURDY VISOR BRACKET Model No.: STDY 86

Description:

· Visor Bracket

- · Suitable to fit in Helmet
- Conforms to EN 397: 2000 ANSI Z89.1: 2014

Origin: Taiwan



HELMET + VISOR

Model No.: STDY 904R + H-86 + FC 48GR

Description:

- Sturdy Brand Helmet Model No. STDY 904R with Visor Holder H-86 with PC visor FC-48GR Dark
- Conforms to CE EN397: 2000

Origin: China / Taiwan





NAUTILUS SAFETY SPECTACLE

Model No.: NTLS FL202 P

Description:

- · An incredibly light, resilient and durable protective eyewear
- Stylish design resembles sunglasses; appeals to both men and women, helping to ensure worker acceptance



- Dual 9.75 base curvature viewing areas in an integral unitary lens offer wide, unobstructed vision
- Scratch resistant, hard-coated 100% polycarbonate lenses filter out more than 99.9% of harmful UV-A and UV-B light
- Conforms to ANSI Z87.1-2020, CE EN166: 2001

Frame & Lens Options:

· Frame Colors : Clear, Grey, Navy Blue · Lens Options : Clear, Amber, Smoke

Origin: Taiwan

NAUTILUS SAFETY SPECTACLE

Model No.: NTLS 1071

Description:

- · Built in brow protection with air flow ventilation
- · One piece lens replaceable
- · Universal nose bridge
- · Length adjustable temples
- Optical class 1 lens, low energy impact resistance
- Lens absorbs 99.9% harmful UV light and resists high impact
- Conforms to ANSI Z87.1-2020 & CE EN166: 2001 standards

Frame & Lens Options:

Frame Color : Yellow

· Lens Options : Clear, Smoke, Amber

Origin: Taiwan

NAUTILUS METAL FREE SAFETY SPECTACLE

Model No.: NTLS 2750

Description:

- · Rimless and 9 base lens design for lightweight and superior close fit
- · Ratchet angle adjustable temple for best-customized fit
- · Built-in brow protection
- Special dielectric hinge design; no metal screw
- Dual material earpiece prevents slipping while providing a soft fit
- Scratch resistant, hard-coated 100% polycarbonate lenses filter out more than 99.9% of harmful UV radiation.
- ANSI Z87.1-2020 & CE EN166: 2001 standards.

Lens Options:

- Clear, Amber, Smoke, Green...tinted lens, Anti-fog, UV400
- Silver, Indoor/Outdoor, Blue, Gold...mirrored lens

Origin: Taiwan

NAUTILUS SAFETY SPECTACLE

Model No.: NTLS 1120

Description:

- · Fashionable design, maximal protection from front to side
- Frame built in brow protection
- One piece lens with nose bridge model
- Universal nose bridge
- Scratch resistant, hard-coated 100% polycarbonate lenses filter out more than 99.9% of harmful UV-A and UV-B light.
- Conforms to ANSI Z87.1-2020, CE EN166: 2001 (1F), AS 1337
- · 1F denotes optical class 1 lens, low energy impact resistance

Frame & Lens Options:

· Frame Color : Navy Blue

· Lens Options : Clear, Smoke, Amber tinted lenses

Origin: Taiwan

NAUTILUS SAFETY SPECTACLE

Model No.: NTLS 1090

Description:

- Revolutionary safety spectacle showcases the maximum safeguard against eye injuries
- Extraordinary 9.75 curved lenses provide more than 180 degree of coverage, without the distraction of seams or traditional type side shields.
- · 4 points adjustable temples
- Semi-frame and slim temple design creates a spectacle that weighs only 27 grams per pc.
- Special nose-buds secure the glass to your face without slipping, while providing a pillow soft fit
- · High impact resistance and anti-scratch lens
- · Lenses provide 99.9% of UV protection
- Conforms to ANSI Z87.1-2020, CE EN166: 2001, AS 1337

Lens Options: Clear, Amber, Smoke

IR5 Infra Red, Green shade 5 lens for gas welders

Origin: Taiwan

NAUTILUS POPULAR UNISEX SAFETY SPECTACLE

Model No.: NTLS 1903

Description:

- Fashionable design resembles sunglasses, suitable for both men and womer



- Close-fitting, unitary front with dual 10 base curved lens offers wide and unobstructed vision
- Co-injection temples for comfortable fit
- Soft nosepiece; universal and snug fit
- Scratch resistant, hard-coated 100% polycarbonate lenses filter out more than 99.9% of harmful UV radiation
- ANSI Z87.1-2020 & CE EN166: 2001 standards.

Lens Options: Clear, Smoke, Amber, Silver Mirror, IO Mirror, Blue Mirror, various lens colors for option



NAUTILUS SAFETY SPECTACLE

Model No.: NTLS 1680

Description:

- Revolutionary safety spectacle showcases the maximum safeguard against eye injuries
- Full wrap around with 9.5 curved lenses provide more coverage
- Semi-frame and slim temple design creates a spectacle that weighs only 28 grams per pc.
- · Length adjustable temples
- · Temple tips PC temple with soft rubber tip for utmost comfort
- · Soft nose piece (TPE) integral to nose bridge and frame (PC)
- · Soft rubber brow cushion makes exceptional comfort and protects from injury
- Scratch resistant, polycarbonate lens provide 99.9% of UV protection
- Meets: ANSI Z87.1-2020 & CE EN166: 2001 standards.

Lens Options: Clear, Amber, Smoke, Green tinted lens, Anti-fog,

Silver, Indoor/ Outdoor, Blue, Gold mirrored lens

Origin: Taiwan

NAUTILUS SAFETY SPECTACLE

Model No.: NTLS 1680N

Description:

- Revolutionary safety spectacle showcases the maximum safeguard against eye injuries.
- Full wrap around with 9.5 curved lenses provide more panoramic coverage
- Semi-frame and slim temple design creates a light spectacle that weighs only 27 grams per pc.
- · Length adjustable temples
- · Temple tips PC temple with soft rubber tip for utmost comfort
- Soft nosepiece (TPE) integral to nose bridge and frame (PC)
- · Soft rubber brow cushion makes exceptional comfort and protects from injury
- · Scratch resistant, polycarbonate lens provide 99.9% of UV protection.

• Meets: ANSI Z87.1-2020 & CE EN166: 2001 standards

Lens Options: Clear, Smoke and Mirrored Lenses

Origin: Taiwan

NAUTILUS SAFETY SPECTACLE

Model No.: NTLS 2011

Description:

- Propionate frame, built-in brow protection, light and tender feeling
- · Extra-large side protection
- · Hard-coated renewable lens
- 2.2 mm polycarbonate class 1 lens, filters out 99.9% of all harmful UV light
- · Full front, side and brow protection with high impact resistance
- Meets: ANSI Z87.1-2020 & CE EN166: 2001

Frame & Lens Options:

Frame Color : BrownLens Options : Clear, Smoke

Origin: Taiwan

NAUTILUS UNISEX OVER SPECTACLE

Model No.: NTLS 2048HC

Description:

- Bigger size of over spectacle, will accommodate all kinds of prescription frames
- Suitable for both women and men, light weight and comfortable
- Full front, side and top protection including three lens coating options: non-coated, anti-scratch coated and anti-fog coated. Non-coated model can be used as throw away visitor spectacle
- $\,$ 99.9% of harmful UV light can be blocked through the optical class one lens
- Perfect and useful protective eyewear with high velocity impact resistance
- Meets: ANSI Z87.1-2020 & CE EN166: 2001

Lens Options : Clear, Amber, Smoke, Green Tinted Lens

Origin: Taiwan

STURDY OVER SPECTACLE

Model No.: STDY 2048

Description:

- Built-in brow protection with air flow ventilation
- · One piece lens replaceable
- · Universal nose bridge
- · Optical class 1 lens, low energy impact resistance
- · Lens absorbs 99.9% harmful UV light and resists high impact
- · Meets: ANSI Z87.1-2020 & CSA Z94.3 standards

Lens & Temple Options:

Lens Options : Clear, SmokeTemple Option : Grey

Origin: China / Taiwan

NAUTILUS POLARIZED SAFETY SUN GLASSES

Model No.: NTLS 1301

Description:

- · Sleek frame and temple design
- · Side panel gives fashionable look
- Polarized polycarbonate safety lenses
- · UV 400 Polarized Lens
- · 100% UV protection
- · Optically correct
- High velocity impact and high mass resistant
- · Meets: ANSI Z87.1-2020 & CE EN166: 2001 standards
- · Meets: VO Ballistic Impact Test Mil PRF 31013: 640 660 ft/sec





NAUTILUS PRESCRIPTION LENSES

Model No.: NTLS 1880

Description:

- Polycarbonate, full front to side protection with brow bar
- · Ratchet angle adjustable temple
- · Length adjustable temple
- · Built-in brow protection
- Soft co-injection nosepiece and earpiece prevent slipping while providing a pillow soft fit.
 - providing a pillow soft fit.

 Scratch resistant, hard-coated 100% polycarbonate lenses filter out more than 99.9% of harmful UV radiation
- Three lens coating options: Non-coated, anti-scratch coated and anti-fog coated, high velocity impact resistance
- Meets: ANSI Z87.1-2020 & CE EN166: 2001 standards

Lens Options: Clear, Amber, Smoke & Indoor outdoor Lens

Origin: Taiwan

NAUTILUS SAFETY GOGGLE

Model No.: NTLS GIV1200

Description:

- Indirect-vent frame provides protection against splash and dust
- Soft vinyl goggle body conforms to facial contours for a very comfortable fit
- · High Impact resistance against flying particles
- Optically correct polycarbonate lens
- Fits over prescription glasses
- · Fully adjustable elastic band
- · Polycarbonate lenses filter out more than 99.9% of harmful UV radiation
- Meets: ANSI Z87.1-2020 & CE EN166: 2001 standards

Lens Options: Clear/Dark Anti-fog Lens, IR3, IR5, Anti-fog Dual Lens

Origin: Taiwan

NAUTILUS PRESCRIPTION LENSES

Model No.: NTLS 7C RX M LENSE FRAME

Description:

 Lightweight RX adaptor suitable for prescription lens less than -3.5 dioptres.
 Lightweight RX adaptor for Model No. NTLS 1880



· Polycarbonate, for Prescription Lens

Origin: Taiwan

NAUTILUS CHEMICAL SAFETY GOGGLE

Model No.: NTLS CHG204

Description:

- · Economic Safety Goggles Soft PVC frame
- · PC lens, Indirect vents on top and bottom
- · Liquid chemical splash, Dust and impact
- Size: 15(W) x 7.5(H) cm
- · Lens also available with anti-fog treatment
- Conforms to CE EN166: 2001 or ANSI Z87.1-2020

Origin: Taiwan

NAUTILUS VENTILATED WELDING GOGGLE

Model No.: NTLS WG208

Description:

· Lens: Green PC Lens

· Frame: Green Soft PVC Frame

Lens Options : Shade #5 or Shade #11

• Features : Indirect ventilation, Economic Welding Goggle

· Conforms to ANSI Z87.1-2020 standard

Origin: Taiwan

NAUTILUS FLIP TYPE WELDING GOGGLE

Model No.: NTLS WG209 - FLIP UP

Description:

· Lens: Green PC Lens

 Frame: Lift front style, Indirect vents, Green PVC Frame, Black ABS Lens Frame

· Lens Options: Shade #5 or Shade #11

Features : Indirect ventilation, Economic Welding Goggle

Conforms to ANSI Z87.1-2020 standard

Origin: Taiwan

NAUTILUS FLIP TYPE WELDING GOGGLE

Model No.: NTLS WG205 - FLIP UP

Description:

 Frame: Lift front style, indirect vents, Green PVC frame, black ABS lens frame

 Features: High quality universal welding goggle soft secure face fit

 Conforms to: CE EN 175 & ANSI Z87.1-2020

Origin: Taiwan



NAUTILUS WELDING GOGGLE

Model No.: NTLS WG206

Description:

 Frame: Indirect vents, Green PVC Frame, Black ABS Lens Frame

 Features: High quality universal welding goggle soft secure face fit

 Conforms to CE EN 175 & ANSI Z87.1-2020





STURDY SAFETY SPECTACLE

Model No.: STDY 1066

Description:

- Built-in brow protection with air flow ventilation
- Universal nose bridge
- Length adjustable temples
- · Optical class 1 lens, low energy impact resistance
- · Lens absorbs 99.9% UV harmful light
- Meets: ANSI / ISEA Z87.1-2020 & CAN / CSA Z94.3-07 (R2012) standards

Frame & Lens Options:

· Frame Color : Blue

• Lens Options : Clear, Smoke, Amber

Origin: China

NAUTILUS SAFETY SPECTACLE

Model No.: NTLS 2520

Description:

- Full wraparound design for maximum field vision and peripheral protection
- Universal fit nose bridge
- · Ratchet angle-adjustable temples provide users personalized fit
- · Lens and temples made from durable polycarbonate
- · Soft temple tip provides superior comfort
- Scratch resistant coated polycarbonate lens provides 99.9% protection against harmful UV ray.
- · Meets: ANSI Z87.1-2020 & CE EN166: 2001 standards


Origin: Taiwan

NAUTILUS GAS WELDING SPECTACLE

Model No.: NTLS 1090 IR5

Description:

 Revolutionary safety spectacle showcases the maximum safeguard against eye injuries



- · 4 points adjustable temples
- Semi-frame and slim temple design creates a spectacle that weighs only 27 grams per pc.
- Special nose-buds secure the glass to your face without slipping, while providing a pillow soft fit
- · High impact resistance and anti-scratch lens
- · Lenses provide 99.9% of UV protection
- Lenses provide protection against infra-red radiation from a bright flame when gas welding
- · Green shade 5 assists the gas cutter welder in seeing the weld clearly
- · Meets: ANSI Z87.1-2020, CE EN166: 2001, AS 1337

Lens Option: Green tinted lens

Origin: Taiwan

NAUTILUS SAFETY SPECTACLE

Model No.: NTLS 9217

Description:

- · Soft nosepiece for cushion fit
- Built-in brow and lateral guard provide extra front and side protection
- · Padded temples for non-slip fitting and pressure dispersion
- · Smooth streamlined finish
- Scratch resistant coated polycarbonate lens provides 99.9% protection against harmful UV ray.
- Meets: ANSI Z87.1-2020 & CE EN166: 2001 standards

Lens Options: Clear/Dark Antifog Lens, IR3, IR5

Origin: Taiwan

NAUTILUS SAFETY SPECTACLE

Model No.: NTLS 2450

Description:

- Ergonomic 9.5 base one-piece lens with close fitting lens and unlimited wrap-around sight
- · Universal fit nose piece
- Innovative ratchet design generates 3 lens angle adjustment for customized fitting
- Thin and flexible polycarbonate temples provide comfortable fit
- Scratch resistant coated polycarbonate lens provides 99.9% protection against harmful UV ray.
- Meets: ANSI Z87.1-2020 & CE EN166: 2001 standards

Origin: Taiwan

STURDY UNISEX SAFETY SPECTACLE

Model No.: STDY 250

Description:

- An Incredibly light, resilient & durable protective eyewear
- Stylish design resembles sunglasses; appeals to both men and women, helping to ensure worker acceptance
- Dual 9.75 base curvature viewing areas in an integral unitary lens offer wide, unobstructed vision.
- Scratch resistant, hard-coated 100% polycarbonate lenses filter out more than 99.9% of harmful UV-A and UV-B light.
- · Meets: ANSI Z87.1-2020 standard

Origin: China

NAUTILUS ANTI-FOG OPTICAL LENS CLEANING & COATING SPRAY

Model No.: NTLS AFS (LENS CLEANING SOLUTION)

Description:

- Characteristics: Anti-fog, Anti-static, Non-toxic, Non-irritant, Non-flammable liquid
- Use: Eye Glasses, Safety Goggles, etc.
- Usage: Spray once or twice on lens of eye glasses and goggles, and wipe it gently for spreading
- Caution: Use for cleaning externally worn product only.
 Do NOT use in eyes or on contact lens.

Origin : China







NAUTILUS SS HAND & FOOT OPERATED EYE WASHER

Model No.: NTLS SS425

Description:

- Bowl : High Quality Stainless Steel 304
- Valve: Eye washer valve is made of ½" stainless steel 304 ball valve
- · Eyewash Head: Twin sprayer with dust cover
- · Water Supply & Outlet: 11/4" IPS
- · Water Working Pressure: 0.2 MPA-0.8 MPA
- Flow Control: 12 L/Min.
- · Origin of Water: Clean Water or Leached Water
- Activation: Eye washer is activated by flag handle or foot treadle
- Meets: EN 15154 2: 2006, AS 4775: 2007,

ANSI Z358.1 : 2009
Origin : China



NAUTILUS HAND AND FOOT OPERATED EYE WASHER

Model No.: NTLS 425

Description:

- Bowl : ABS Plastic in safety green color with yellow warning tape
- Valve: Eye washer valve is made of ½" brass ball valve
- · Eyewash Head: Twin sprayer with dust cover
- · Water Supply & Outlet: 11/4" IPS
- · Water Working Pressure: 0.2 MPA-0.8 MPA
- · Flow Control: 12 L/Min.
- · Origin of Water: Clean Water or Leached Water
- Activation: Eye washer is activated by flag handle or foot treadle
- Meets: EN 15154 2: 2006, AS 4775: 2007, ANSI Z358.1: 2009

Origin : China



NAUTILUS PROPORTIONATE SAFETY SHOWER & EYE WASHER

Model No.: NTLS SS620

Description:

- · Piping: High Quality Stainless Steel 304
- · Head/Bowl: ABS plastic in safety green color.
- Valve: Shower valve is made of 1" S.S.304 ball valve, eye washer valve is made of ½" S.S. 304 ball valve
- · Water Supply & Outlet: 11/4" IPS
- · Water Working Pressure: 0.2 MPA-0.8 MPA
- · Shower Flow Control: 76 L/Min.
- · Eyewash: 12 L/Min.
- · Origin of Water: Clean Water or Leached Water
- Activation: Shower is activated by pull rod, eye washer is activated by flag handle or foot treadle
- Meets: EN 15154 1 & 2: 2006, AS 4775: 2007, ANSI Z358.1: 2009

Origin: China



NAUTILUS SAFETY SHOWER & EYE WASHER

Model No.: NTLS 320

Description:

- · Piping: High Quality ABS
- · Head/Bowl : ABS plastic in safety green color.
- Valve: Shower valve is made of 1" brass ball valve, eye washer valve is made of ½" brass ball valve
- · Water Supply & Outlet: 11/4" IPS
- · Water Working Pressure: 0.2 MPA-0.8 MPA
- Shower Flow Control: 76 L/Min.
- · Eyewash: 12 L/Min.
- · Origin of Water: Clean Water or Leached Water
- Activation: Shower is activated by pull rod, eye washer is activated by flag handle
- Meets: EN 15154 1 & 2: 2006, AS 4775: 2007, ANSI Z358.1: 2009

Origin: China

NAUTILUS SS SAFETY SHOWER & EYE WASHER

Model No.: NTLS SS520

Description :

- Piping: High Quality Stainless Steel 304
- · Head/Bowl: High Quality Stainless Steel 304
- Valve: Shower valve is made of 1" stainless steel 304 ball valve, eye washer valve is made of ½" stainless steel 304 ball valve
- Water Supply & Outlet: 11/4" IPS
- · Water Working Pressure: 0.2 MPA-0.8 MPA
- · Shower Flow Control: 76 L/Min.
- · Eyewash: 12 L/Min.
- Origin of Water: Clean Water or Leached Water
- Activation: Shower is activated by pull rod, eye washer is activated by flag handle or foot treadle
- Meets: EN 15154 1 & 2: 2006, AS 4775: 2007, ANSI Z358.1: 2009

Origin: China



NAUTILUS SAFETY SHOWER & EYE WASHER

Model No.: NTLS 520

Description:

- · Piping: High Quality GI
- Head/Bowl : ABS plastic in safety green color with yellow warning tape.
- Valve: Washer valve is made of 1" brass ball valve, eye washer valve is made of ½" brass ball valve
- Water Supply & Outlet: 1¼" IPS
- Water Working Pressure: 0.2 MPA-0.8 MPA
- Shower Flow Control: 76 L/Min.
- Eyewash: 12 L/Min.
- Origin of Water : Clean Water or Leached Water
- Activation: Shower is activated by pull rod, eye washer is activated by flag handle or foot treadle
- Meets: EN 15154 1 & 2: 2006, AS 4775: 2007, ANSI Z358.1: 2009

Origin: China





NAUTILUS SS SAFETY EYE WASHER WITH COVER

Model No.: NTLS SS E300

Description:

- · Bowl: Stainless Steel 304 (INOX)
- · Valve : Eye washer valve is made of 1/2" stainless steel 304 ball valve
- Water Supply: ½" & Outlet: 1¼" IPS/NPT
- · Water Working Pressure: 0.2 MPA-0.8 MPA
- · Flow Control: 12 L/Min.
- Origin of Water: Clean Water or Leached Water
- · Activation: Eye washer is activated by flag handle.
- Meets: EN 15154 2: 2006, AS 4775: 2007, ANSI Z358.1: 2009

Origin: China



NAUTILUS SS SAFETY SHOWER & EYE WASHER WITH COVER

Model No.: NTLS SS-S300

Description:

- · Piping Material: Stainless Steel 304
- · Shower Head: ABS plastic in safety yellow color. Eyewash Bowl: Stainless Steel 304
- Valve : Shower valve is made of 1" stainless steel ball valve, eye washer valve is made of 1/2" stainless steel ball valve
- Water Supply & Waste Outlet: 1¼" IPS/NPT
- · Water Working Pressure: 0.2 MPA-0.8 MPA
- · Flow Control: Shower head 76 L/Min.
- Eyewash: 12 L/Min.
- · Origin of Water: Clean Water or Leached Water
- · Activation : Shower is activated by pull rod, eye washer is activated by flag push handle
- Meets: EN 15154 1 & 2: 2006, AS 4775: 2007, ANSI Z358.1: 2009

Origin: China

NAUTILUS SS WALL MOUNTED EYEWASH WITH COVER

Model No.: NTLS SS B200

Description:

- · Eyewash Bowl & Cover: Stainless Steel 304
- Valve: Eye washer valve is made of ½" stainless steel 304 ball valve
- Water Supply: 1/2" & Waste Outlet: 1" IPS/NPT · Water Working Pressure: 0.2 MPA-0.8 MPA
- · Flow Control: 12 L/Min.
- · Origin of Water: Clean Water or Leached Water
- · Activation: Eye washer is activated by flag push handle.
- Meets: EN 15154 2: 2006, AS 4775: 2007, ANSI Z358.1: 2009

Origin: China



NAUTILUS SS SAFETY EYE WASHER WITH COVER

Model No.: NTLS SS-E350

Description:

- · Eyewash Bowl & Cover: Stainless
- Steel 304
- Valve: Eye washer valve is made of 1/2" stainless steel 304 ball valve
- Water Supply: 1/2" & Outlet: 11/4" IPS/NPT
- Water Working Pressure: 0.2 MPA-0.8 MPA
- Flow Control: 12 L/Min.
- Origin of Water: Clean Water or Leached Water
- Activation: Eye washer is activated by flag handle or foot treadle.
- Meets: EN 151542: 2006, AS 4775: 2007, ANSI Z358.1:2009

Origin: China



NAUTILUS SS SAFETY SHOWER & EYE WASHER WITH COVER

Model No.: NTLS SS-S350

Description:

- Shower Head / Eyewash Bowl & Cover: Stainless Steel 304
- Valve: Shower valve is made of 1" S.S.304 ball valve, eye washer valve is made of 1/2" S.S. 304 ball valve
- Water Inlet & Outlet: 11/4" IPS/NPT
- Water Working Pressure: 0.2 MPA-0.8 MPA
- · Flow Control: Shower head 76 L/Min.
- Eyewash: 12 L/Min.
- Origin of Water: Clean Water or Leached Water
- Activation: Shower is activated by pull rod, eye washer is activated by flag handle or foot treadle
- Meets: EN 15154 1 & 2: 2006, AS 4775: 2007, ANSI Z358.1: 2009

Origin: China

NAUTILUS ABS PLASTIC WALL MOUNTED EYE WASHER

Model No.: NTLS 210

Description:

- · Bowl : ABS plastic in safety green color.
- · Valve : Eye washer valve is made of 1/2" brass ball valve
- Water Supply & Outlet: 1¼" IPS
- Water Working Pressure: 0.2 MPA-0.8 MPA
- Flow Control: 12 L/Min.
- · Origin of Water: Clean Water or Leached Water
- · Activation: Eye washer is activated by flag handle
- · Meets: EN 15154 2: 2006

Origin: China





NAUTILUS EMERGENCY SHOWER

Model No.: NTLS 720 ABS

Description:

- · Piping : Galvanized Steel
- · Head / Bowl : ABS plastic in safety green color
- · Valve : Shower valve is made of 1" brass ball valve
- Shower Activation: Shower is activated by stainless steel 304 pull rod, operating a stay open ball valve
- Supply connection: 11/4" IPSWater Working Pressure: 0.2-0.8MPA
- Flow control : 76L/Min
- Meets: EN 15154 1: 2006, AS 4775: 2007, ANSI Z358.1: 2009

Origin: China

NAUTILUS PORTABLE EYE WASH

Model No.: NTLS 14

Description:

- Provides 15 min. of decontaminating water flow
- 35 ltrs. tank capacity made on chemical resistant High Density Polyethylene (HDPE) Green material
- Activated by simply pulling the retractable tray, made on High Density Polyethylene (HDPE) Orange
- · Retractable tray protects against air borne contaminants
- · Large filling cap for easy filling, cleaning and inspection
- Ensures positive flow within 1 sec. of activation
- · High visibility colours provide guicker identification
- Mounted on bracket supplied that easily bolts to wall
- · Sprinklers Black nylon with inside High Perforated filters
- Pipe : SiliconFlow : Gravity Flow
- Water: Use drinking water / as suggested by your Physician
- Conforms to: 89/686/EEC, ANSI Z358.1, DIN 12899 and UNI-9608-4. 1990

Origin: India

NAUTILUS FREEZE CONTROL UNIT - GALVANIZED

Model No.: NTLS 800

Description:

- NTLS 800 is an anti-freeze and automatic emptying galvanized steel eyewash to wash eyes. The water supply system can be used by foot pedal. When the washing is finished, you should leave from the foot plate, the water supply system will be closed and water in pipe will be emptied, result in anti-freezing function in the outside door in winter.
- Piping Material : Galvanized Steel
- Eyewash Bowl : ABS in Safety Green color
- Eyewash Head : Twin Sprayers with ABS dust cover
- Eyewash Valve : ½" Chrome plated brass ball valve
 Eyewash Activation : By push handle or foot pedal
- Water Supply & Outlet: 1" IPS
 Flow Control : 12 L/Min.
 Water Working Pressure: 0.2-0.6MPA

Meets: EN 15154 2: 2006

Origin : China

NAUTILUS ABS WALL MOUNTED SHOWER

Model No.: NTLS 115

Description:

- Head: ABS plastic in safety green color with yellow warning tape.
- · Valve : Shower valve is made of 1" brass ball valve
- Water Supply & Outlet: 1" IPS
- Water Working Pressure : 0.2 MPA-0.8 MPA
- Flow Control : 76 L/Min.
- Origin of Water : Clean Water or Leached Water
- · Activation: Shower is activated by pull rod.
- Meets: EN 15154 1: 2006

Origin: China

FIRST AID KIT

4SITE FIRST AID KIT

Model No.: FIRST AID KIT FOR 10 PERSONS Description:

 4½" x 7½" x 2¾" case selections, weather proof steel & plastic, steel (non-gasketed), complete refill.

Origin : USA

FIRST AID 10 Person Kit A SITE OSHA Complant KI

Model No.: FIRST AID KIT FOR 25 PERSONS Description:

 6½" x 9½" x 2¾" case selections, weather proof steel & plastic, steel (non-gasketed), complete refill.

Origin: USA

PIRST AID PESON KIT A SITE OSHA Compliant KIT

FIRST AID 50 Person Kit

Model No.: FIRST AID KIT FOR 50 PERSONS Description:

 9½" x 13½" x 2¾" case selections, weather proof steel & plastic, steel (non-gasketed), complete refill.

Origin: USA

GOLDEN EAGLE HAND SANITIZER

HAND SANITIZER

Description :

 GOLDEN EAGLE Hand Sanitizer is in gel form and leaves your hands feeling soft, fresh and smooth. The bottle size is convenient to carry in your pocket or handbag. It is enriched with moisturizers and contains ingredients that kill 99.9% germs when used as directed.

Directions for use:

 Apply on your palm and rub back of hands and under fingernails until dry.

Caution:

 For external use only. Keep away from heat or flame; avoid eye contact. Keep out of reach of children below 5 years of age.

Origin: UAE





NAUTILUS FULL BODY HARNESS

Model No.: NTLS 201

Description:

: A dorsal attachment D-Ring Anchorage

· Adaptability : Adjustable shoulder and thigh straps

: Shoulder and thigh straps differentiated by a dual color Convenience

: Ideally positioned sit strap for extended comfort Ergonomics

· Physical Parameter: Size: Universal

· Compliance : Conforms to EN361 : 2002 & ANSI Z359.1 - 2007

Origin: UAE / China



NAUTILUS FULL BODY HARNESS

Model No.: NTLS 203

Description:

· Anchorage : Two chest attachment D-Ring and a dorsal attachment

 Adaptability : Adjustable shoulder and thigh straps.

 Convenience : Shoulder and thigh straps differentiated by a dual colour

 Ergonomics : Ideally positioned sit strap for extended comfort

· Physical Parameter: Size: Universal

· Compliance : Conforms to EN361: 2002

Origin: UAE / China



NAUTILUS FULL BODY HARNESS

Model No.: NTLS 202

Description:

: Two chest attachment textile loops and a Anchorage

dorsal attachment D-Ring.

· Adaptability : Adjustable shoulder and thigh straps.

: Shoulder and thigh straps differentiated by a Convenience

dual colour scheme.

· Physical Parameter: Size: Universal

• Ergonomics : Ideally positioned sit strap for extended comfort

· Compliance : Conforms to EN361: 2002

Origin: UAE / China



NAUTILUS FULL BODY HARNESS

Model No.: NTLS 204

Description:

· Anchorage : One chest attachment D-ring and a dorsal

attachment D-ring

· Adaptability : Adjustable shoulder and thigh straps.

: Shoulder and thigh straps differentiated by a · Convenience

dual colour scheme.

• Ergonomics : Ideally positioned sit strap for extended comfort

· Physical Parameter: Size: Universal

· Compliance : Conforms to EN361: 2002

Origin: UAE / China



Front View



NAUTILUS FULL BODY HARNESS

Model No.: NTLS 402

Description:

Anchorage : 2 Chest attachment textile loops and a dorsal attachment

D-Ring for Fall Arrest

2 lateral D-Rings for work positioning

Adaptability : Adjustable thigh straps, waist belt and shoulder strap

Convenience : Shoulder & thigh straps differentiated by a dual color

Scheme. Tool holder loops and rings

· Physical Parameter: Size: Universal

• Ergonomics : Ideally positioned sit strap for extended comfort.

Two lateral positioning D-rings and a back support pad

• Compliance : Conforms to EN361 : 2002 & EN358

Origin: UAE / China



NAUTILUS INDUSTRIAL BELT OR WORK POSITIONING BELT

Model No.: NTLS 01

Description:

· Narrow back comfort pad.

· Two side D-Ring of forged alloy steel.

· Rings for tool holders, bolt bags etc.

Rope Lanyard directly fitted to D-Ring, Other side NTLS 1012.

• Conforms to EN358

Origin: UAE / China



NAUTILUS TOWER HARNESS

Model No.: NTLS 506

Description:

 Anchorage : One Dorsal and one chest D-Ring for fall arrest. One Ventral D-Ring at waist level for rope access work. Two

lateral D-Rings for work positioning.

• Adaptability : Adjustable thigh straps, waist belt and shoulder straps.

• Ergonomics : Soft padding on shoulder, waist and leg straps. Specially

designed for the work on tower and posts.

• Convenience : An ideal combination of Fall Arrest, Work Positioning,

Rescue and Rope Access Application.

Physical Parameter: Size: Universal
 Compliance: Conforms to EN361: 2002, EN358 & EN813.

Origin: UAE / China



STURDY FULL BODY HARNESS

Model No.: STDY 20

Description:

Anchorage : A dorsal attachment D-Ring

Adaptability : Adjustable shoulder and thigh straps

Convenience : Shoulder and thigh straps differentiated by a dual color

scheme

• Ergonomics : Ideally positioned sit strap for extended comfort

• Physical Parameter : Size : Universal

• Compliance : Conforms EN361 : 2002

Origin: UAE / China





NAUTILUS ENERGY ABSORBER FORKED WEBBING LANYARD

Model No.: NTLS 3061 AL



Description:

- · 44 mm wide webbing
- Length: 1.5 mtr., 1.8 mtr., 2.0 mtr.
- Provided with 2 Aluminium Scaffold Hooks NTLS 1031 & One Steel Karabiner NTLS 1013
- · Conforms to EN355

Origin: UAE / China

NAUTILUS ENERGY ABSORBING WEBBING LANYARD

Model No.: NTLS 3028 ()

Description:

- · One side Hook Steel Scaffold NTLS 1031
- · Other side Karabiner NTLS 1012
- · Length: 1.0 m, 1.5 m, 2.0 m
- · Loops Protected for Abrasions by Protective Sleeve
- · Conforms to EN355 Origin: UAE / China

NAUTILUS ANCHORAGE ROPE

Model No.: NTLS 960

Description:

- Three strand twisted rope 12 mm & 14 mm
- One side loop other side stop knot
- Length: 10 to 100 mtr.

Origin: India / China



NAUTILUS ROPE LANYARD

Model No.: NTLS 2003

Description:

- NTLS 2003 Rope Lanyard
- comprises of NTLS 2001 Rope Lanyard and both ends NTLS 1012 Karabiners.
- · Length: 1.5 mtr., 1.8 mtr., 2.0 mtr.
- · Built in Uvicator strands
- · Conforms to EN354

Origin: UAE / China

NAUTILUS ANCHORAGE WEBBING SLING

Model No.: NTLS 803S

Description:

- · Made of 44 mm wide polyester webbing
- · Strength: Min. 15 kN for 3 minutes
- · Length: 0.5 mtr., 1.2 mtr. having two textile loop at the end.
- Conforms to EN795: 1996

Origin: UAE / China



NAUTILUS STEEL SCREW LOCKING KARABINER

Model No.: NTLS 1012

Description:

· Material : Alloy Steel · Opening: 16 mm. min. Strength: 22 kN min. · Conforms to EN362

Origin: India / China



NAUTILUS ENERGY ABSORBER FORKED WEBBING LANYARD

Model No.: NTLS 3061

Description:

- · 44 mm wide webbing
- Length 1.5 m, 1.8 m, 2.0 m
- Provided with 2 Steel Scaffold Hooks NTLS 1031 & One Steel Karabiner NTLS 1012

(

· Conforms to EN355

Origin: UAE / China

STURDY ENERGY ABSORBER FORKED WEBBING LANYARD

Model No.: STDY 360

Description:

- · 44 mm wide webbing
- · Length: 1.8 mtr.
- · Provided with 2 steel scaffold hooks and one Steel Karabiner
- · Conforms to EN355.

Origin: UAE / China

NAUTILUS ROPE GRAB FALL ARRESTOR

Model No.: NTLS 2000A

Description:

- · Fall Arrestor on Polyamide Rope
- · Works on 14 mm to 16 mm dia. anchorage line
- · Steel Karabiner NTLS 1012 as an attachment element
- · Gravity locking to prevent incorrect use
- · Double security opening system
- · Conforms to EN353-2

Origin: India

NAUTILUS WIRE ROPE FALL ARRESTOR

Model No.: NTLS 2001

Description:

- · Stainless steel movable type fall arrestor on steel cable anchorage line
- · Anchorage line of steel cable dia.: 8 mm
- · Conforms to EN353-2

Origin: India

NAUTILUS RETRACTABLE WEBBING FALL ARRESTOR

Model No.: NTLS 2002

Description:

- · Having a Retractable Webbing of width: 46 mm
- · Maximum Length: 2.5 mtr.
- · Having a protective casing
- Incorporating an Energy Absorber (Cushion NTLS 300) for shock absorption
- Supplied with 2 steel karabiner (BOND NTLS 1012) as attachment elements
- · Conforms to EN360

Origin: India



NAUTILUS STEEL QUARTER TURN LOCKING KARABINER

Model No.: NTLS 1013

Description:

· Material : Alloy Steel • Opening: 18 mm. min. · Strength: 22 kN min.

· Conforms to EN362

Origin: India / China



NAUTILUS DOUBLE DENSITY PU NITRILE RIGGER BOOT

Model No.: NTLS 463 S3

Description:

Leather : Cherry Brown Water Repellent

Lining : Soft FabtexSole : Nitrile

• Features: Pull on type, padded socks, oil, acid and

heat resistant Nitrile sole. Puncture resistant steel plate 1100 Newton, stitched with fire retardant

thread


Toe Protection : 200 JoulesOption : Also available in

Black / Tan : 38 to 46

· Conforms to EN20345: 2011 Standard

Origin: India

Sizes



NAUTILUS HIGH ANKLE SAFETY BOOT

Model No.: NTLS 446 S1P SRC

Description:

Lining

 Leather : Genuine leather Golden Tan with Heavy duty stitching

Soft Sweat absorbing

lining; Beige, Grey or option

Orange

 Sole : Oil / Chemical Resistant Injected PU with shock

absorbing heel

Features : Padded Calf protection, padded insole socks, padded ankle,

Pull Up Tags, Protective Heel Cups

Toe Protection : Anti-rust coated 200 Joules
 Anti-Puncture : Steel Midsole 1100 Newton
 Option : Also available in S2 & S3

• Sizes : 38 to 47

· Conforms to EN20345: 2011 Standard

Color Option : Brown Origin : China

NAUTILUS CAMEL & NUBUCK HIGH ANKLE SAFETY BOOT

Model No.: NTLS 369 S3 SRC

Description:

Lining

Leather : Camel and NuBuck splash resistant

tan with heavy duty stitchingSoft sweat absorbing lining;

beige, grey or option orangeSole : Oil / chemical resistant

injected PU with shock absorbing heel

.... D....

 Features: Rust resistant eyelets, padded insole socks, padded ankle collar, padded tongue, high

reflective retro reflector

Toe Protection : Anti-rust coated 200 Joules
 Anti-Puncture : Steel Midsole 1100 Newton

• Option : Also available in S1P & S2

• Sizes : 37 to 47

· Conforms to EN20345 : 2011 Standard

Origin: China

NAUTILUS WATER RESISTANT RIGGER BOOT

Model No.: NTLS 3993R S3 SRA

Description:

Upper : Action water resistant leather

with man made materials
: Soft Sweat absorbing lining;

Lining : Soft Sweat absorbing lining;
 Brown. Option Grey or Orange

 Sole : Oil / Chemical Heat Resistant Stitched Cemented Rubber Sole.

 Features: Padded insole socks and collar; shock absorbing heel 100% water resistant with heavy duty CE

standard rubber sole. Cemented and stitched 100% all around to

alleviate de-bonding

· Toe Protection: Anti-rust coated 200 Joules.

Anti-Puncture : Steel anti-rust coated Midsole 1100 Newtons
 Sizes : 36 to 48. Larger sizes subject to inducement.

· Conforms to EN20345: 2011 Standard.

Color Option : Brown **Origin :** China

STURDY SAFETY WETBOOT

Model No.: STDY 163

Description:

· Metal Free

• 100% Waterproof bonded to the Sole

· Comfort and breathes. Triple Stitched to the vamp

· Cushioned and Skid Resistant tested to ASTM 2913

Sweat AbsorptionVamp : Rubber

Upper : Real Suede Leather

Sole : RubberLining : Cambrella

Insert : 400 gsm ThinsulateLaces : Braided matching

Collar : Rubber Foam with

ankle protection

Toe Cap: 200 joules Composite toe cap for extra safety in Electrical use
 Midsole: 1200 Newton ASTM compliant non-woven fabric; light, flexible,

rust free

· Optional: Extra-long with Lace Loops to open the collar wide

• ASTM F 2412/F2413 MI/75 C/75 + ASTM 2913

Origin: China

TORO CORDOVAN COLOR HIGH ANKLE SAFETY BOOT

Model No.: TORO 3369 S1P SRC Description:

 Leather : Cordovan splash resistant action leather with heavy duty stitching

Lining : Cordovan color soft sweat absorbing lining

• Sole : Oil / acid resistant double density PU SRC anti-skid

injected PU sole
• Features : Rust resistant eyelets,

padded insole socks, padded ankle collar, padded tongue, high

padded tongue, high
reflective retro reflector & zipper as an option

Toe Protection : Anti-rust coated 200 JoulesAnti-Puncture : Steel midsole 1100 Newton

Sizes : 37 to 47

 Conforms to EN20345 : 2011 S1P SRC Toe cap meets ASTM 2412/2413-11 Standard

Origin: China





NAUTILUS LOW ANKLE WATER RESISTANT EXECUTIVE SHOE

Model No.: NTLS 2688R S3 SRC

Description:

· Upper : Micromesh water resistant

leather with hand moccasin stitching

· Lining : Soft Sweat absorbent Black

lining; Option Brown, Grey or Orange

: Oil / Chemical Heat Sole Resistant Stitched Cemented

skid resistant CE Standard Rubber Sole

Features: Padded insole socks, tongue and collar; shock absorbing heel 100% water resistant with highly skid resistant CE standard Cemented

rubber sole stitched 100% all around to alleviate de-bonding

· Toe Protection: Anti-rust coated 200 Joules.

· Anti Puncture : Steel anti-rust coated Midsole 1100 Newtons : 36 to 47. Larger sizes subject to inducement.

· Conforms to EN20345: 2011 Standard.

Color Option: Black Origin: China / India

NAUTILUS LOW ANKLE EXECUTIVE SHOE

Model No.: NTLS 949 S2 PU / TPU

Description:

· Leather : Black / Brown Full Grain, Water Repellant

Lining : Soft Brown / Black Cambrelle

Sole : PU / TPU

Features: Oil / chemical and heat resistant PU / TPU sole upto 300°C antistatic

insole

· Toe Protection: 200 Joules

Option : Also available in S1P & S3

Sizes : 38 to 47

· Conforms to EN20345: 2011 Standard

Color Option: Black / Brown (Optional)

Origin: India / China





NAUTILUS LOW ANKLE EXECUTIVE SLIP ON SHOE

Model No.: NTLS 1562 S3

Description:

· Leather : Cow FG HairCell Black, Water Repellent

: Soft Fabtex with 3 mm Foam Lining

Sole

: Padded socks, padded ankle, oil/chemical and heat resistant Features

PU sole, antistatic insole. Puncture resistant steel plate 1100

Newton

• Toe Protection : 200 Joules

: Also available in S1P & S2 Option

: 38 to 48

· Conforms to EN20345: 2011 Standard

Color Option: Black





NAUTILUS LOW ANKLE LADIES SAFETY SHOE

Model No.: NTLS 2142 S1P

Description:

· Leather : Microfiber + Suede Leather · Lining : Mesh

Sole : Rubber Cementing

Features: Composite Toe + Non-metal Midsole anti-static,

Two color sports flat lace

Mid Plate: Kevlar 1100 Newton

Sizes : 3 to 8 (Ladies Sizing

· Conforms to EN 345-1 CE

Color Options:

· Pink, Red, Orange

Origin: China



NAUTILUS LOW ANKLE SHOE (SMOOTH)

Model No.: NTLS 469 S1P

Description:

· Leather : Black / Brown Full Grain Smooth

Lining : Soft Fabtex

• Sole

• Features: Rust proof eyelets, padded socks, padded ankle, oil/chemical and heat resistant PU sole, antistatic insole. Puncture resistant steel plate

1100 Newton.

· Toe Protection: 200 Joules

• Option : Also available in SB, S1, S2 & S3

• Sizes : 38 to 46

· Conforms to EN20345: 2011 Standard

Color Option: Black

Origin: India





NAUTILUS HIGH ANKLE SHOE

Model No.: NTLS 2698

Description:

· Leather : Water resistant Suede Upper

Skid Resistant SRC tested double density PU sole

& 1100N Steel Midsole

· Eyelets : Coated rust resistant eyelets

: 200J Steel Toecap Toe meets ASTM F2413-05

MI/75

· Option : Men's and ladies sizes

available

• Conforms to EN20345: 2011 S3 SRC

Color Option: Grey Origin: China





NAUTILUS HIGH ANKLE SHOE

Model No.: NTLS 442 S1P

Description:

Type : Nautilus High AnkleLeather : Black / Brown Full Grain

Lining : Soft FabtexSole : Nitrile Rubber

 Features
 Rust Proof "D" ring, padded socks, padded ankle, oil/chemical, acid, alkali and heat resistant nitrile sole upto 300°C antistatic

insole

• Toe Protection : 200 Joules

• Option : Also available in SB, S1P, S2 & S3

Sizes : 38 to 46Conforms to EN20345 : 2011 Standard

Color Option : Black Origin : China / India



STURDY WATER RESISTANT HIGH ANKLE SAFETY BOOT

Model No.: STDY 452R S3 SRA

Description:

Upper : Microfiber water resistant leather with synthetic heel cup
 Lining : Soft sweat absorbing lining; Black; option Grey or Orange
 Sole : Oil / chemical heat resistant stitched cemented rubber sole

Features: Rust resistant eyelets, padded insole socks, ankle collar, padded tongue 100% water resistant with heavy duty CE standard rubber

The standard rubber and rubber

sole shock absorbing heel. Cemented and stitched 100% all around to alleviate de-bonding

Toe Protection : Anti-rust coated 200 Joules.

Anti-Puncture: Steel anti-rust coated
 Midsole 1100 Newtons

Sizes : 36 to 48. Larger sizes subject to inducement.

 Conforms to EN20345: 2011 Standard.

Color Option : Black

Origin : China



ROCK HIGH ANKLE SHOE

Model No.: RK 453 SBP

Description:

Leather : Black Full GrainLining : Soft FabtexSole : PU

· Features: Rust Proof "D" ring, padded socks, padded ankle, oil/chemical and

heat resistant PU sole, antistatic insole. Puncture resistant steel plate 1100 Newton.

• Toe Protection: 200 Joules

• Option : Also available in SB, S1, S1P & S3

• Sizes : 38 to 48

Conforms to EN20345 : 2011 Standard

Color Option: Black
Origin: India / China



NAUTILUS HIGH ANKLE SHOE

Model No.: NTLS 443 S1P

Description:

Leather : Black / Brown Full Grain

Lining : Soft FabtexSole : PU

• Features : Rust Proof "D" ring, padded socks, padded ankle, oil/chemical

and heat resistant PU sole, antistatic insole. Puncture resistant

steel plate 1100 Newton.

 Toe Protection : 200 Joules
 Option : Also available in SB, S1 & S1P

 Sizes : 38 to 46
 Conforms to EN20345 : 2011 Standard

Color Option: Black Origin: China / India



STURDY HIGH ANKLE SHOE

Model No.: STDY 454 S1P

Description:

· Leather : Split Embossed Leather

Tongue : PU

· Lining : Smooth Mesh (Grey) / Soft Fabtex.

• Insole : Grey Mesh + EVA

Sole : 16PU / PU Injection for black + Grey Colours / Rubber

Features: Rust Proof 'D' ring, padded socks, padded ankle, oil / chemical and

heat resistant rubber sole up to 250°C, antistatic insole.

Toe Protection : 200 JoulesOption : Available in SB, S3.

• Sizes : 38 to 48

 Conforms to EN20345: 2011 Standard, EN 345 Standard Steel Toe & Steel Midsole.

Color Option : Black
Origin : China





ROCK LOW ANKLE SHOE

Model No.: RK 401 S1P

Description:

• Leather : Leather upper with Cordura ventilation panels, Rest Man Made

Materials

• Lining : Soft Fabtex

Sole : Double Density SRC Skid resistant PU Sole with Shock Absorbing

Heel

 Features: Rust Proof eyelets, oil / chemical and heat resistant double density PU sole with padded removable

washable insole

• Toe Protection : 200 Joules

Toecap Meets: ASTM MI / 75 C / 75

• Sizes : 38 to 48

Conforms to EN20345 : 2011 SRC Standard

Origin : China





4SITE SAFETY GUMBOOT

Model No.: 4SITE 301 S5 SRC

Description:

Upper Material: 100% PVC

 Lining : Quick Drying, Synthetic Fiber

Toe Cap : 200 Joules CE Midsole : 1100 Newtons CE

: Direct Injection PVC SRC rated

: 395 mm including heel • Thickness: 4.5 mm - 2.0 mm • Colour : Green upper with black sole

: 38 to 48 Size

Conforms to CE EN 20345 : 2011

Color Option: Green Origin: China



Model No.: STDY 300

Description:

Skid resistance : SRA : PVC Material

Thickness of bottom: 4 mm - 4.5 mm : 1.8 mm - 2.0 mm Thickness of top

Thickness of sole : 5 mm - 6.0 mm not including

lugs thickness

Conforms to CE Category 04 FO (EN20347: 2011)

Color Option: Black Origin: China





STURDY HI VIS BRIGHT YELLOW GUMBOOT

Model No.: STDY 901 S5 SRC

Description:

Toe Cap: Steel rust proofed - 200 joules Sole : Anti-skid design with deep lugs and ladder lugs in middle of sole. Acid,

Alkali and Heat Resistant Nitrile sole

• Midsole: Non-woven - 1200 Newton Thickness of bottom: 8-11 mm Thickness of top : 1.9-2.2 mm

Thickness of sole : 6.9-7mm not including lugs thickness

Height: 38 cm • Weight: 2 kg

Option : Removable Felt Liner

Standard: ASTM F2412/F2413 MI/75 C/75 PR with ASTM F-2913 skid

resistance

· Conforms to Meets or exceeds CE 20345: 2011 S5 SRC

Color Option: Yellow Origin: China

ROCK BRAND GUMBOOT

Model No.: ROCK 303 - CE CATEGORY GARDEN BOOT (EN20347: 2011)

Description:

· Skid resistance: SRA or better Material : PVC : 335 mm Height Weight : 1.5 kg

Meets or exceeds the requirement of BIS

(IS: 12254: 1993) without the Toe cap

Color Option: Black Origin: India



FIRE PROTECTION

NAUTILUS FIRE RESISTANT BLANKETS

Model No.: NTLS 3803 & NTLS GFC 2200 **Description:**

· Glass yarn is woven with continuous filament, low alkali, 'E' glass yarn fibre on high technology shuttle-less looms.

· Glass is an inherently inert substance. It does not rot; it does not decay; it does not absorb moisture as, for example, do natural fibres such as cotton or hessian. It will also not leach out volatile solvent oils from the medium it is

Glass is unaffected by micro-organisms or by the effects of the elements.



NTLS GFC 2200

MODEL: NTLS 3803 / NTLS GFC 2200					
Weave Type	Twill	Composition	100% E-glass		
Yarn Count (Wrap x Weft)	Wrap : 20 ± 1, Tex 33 x 4 Weft : 10 ± 1, Tex 33 x 4	Fabric Finish	Fray Proof Type PT 20		
Weight	430 ± 19.2 g/sq. mtr.	Temperature Resistance	Continuous Duty 550°C		
Thickness	(1) 0.38 ± 0.03 mm	Roll Measurement	Rolls 1000 mm x 50 mtr.		
	(2) 1.00 mm	Technical Standard	AS/NZS 3504 EN-1869/1997, 1094-3-2003		

FIRE EXTINGUISHER

Description:

- Our Dry Powder Fire Extinguishers are effective or all types of fires: Class A, B
- · Dry Powder Agents Mono Ammonium Phosphate & Ammonium Sulphate base are non conductive to electricity.
- When discharged, the heat from the fire is greatly reduced because a cloud of powder provides an effective heat shield resulting in an immediate knock down of flames. Flames are controlled and a layer of melted powder extinguishes any embers.

Origin: China



FIRE EXTINGUISHER Capacity (kg): 1, 2, 4.5, 6, 9, 12



CARBON DIOXIDE (CO₂) FIRE EXTINGUISHER Capacity (kg): 2.3 (5 lbs), 5



FIRE EXTINGUISHER Capacity (kg): 9



FIRE EXTINGUISHER Capacity (Ltr.): 6, 9

FIRE BLANKETS WITH PVC COVER

Description:

Origin: China

- · For smothering and extinguishing fires in industrial establishments, offices, warehouses and
- The blanket is made from woven glass fibre (totally asbestos free). Facility for Wall mounting.
- Easy and quick withdrawal of blanket from container.
- Product independently tested and certified to BS EN 1869: 1997 and AS/NZS 3504: 2006
- Sizes 4' x 4'; 4' x 6', 6' x 6'

Origin: China







NAUTILUS NOMEX IIIA COVERALL

Model No.: NTLS NOMEX IIIA

Description:

- Fire Retardant Coverall made with DuPont™ Nomex® IIIA. Fiber Composition 93% Nomex®, 5% Kevlar®, 2% P-140 (antistatic fibers) Double stitched with EN531 CE Certified FR thread, FR brass zip and FR reflective tapes. All stress Points locked. Available in all sizes in a range of deep dyed colors including custom colors subject to inducement. Nomex® is 30% lighter than FR Cotton and 40% lighter than FR Polycotton. These properties help to keep the worker safe, cool and dry, and reduce worker fatigue. Flame Resistant fabric compliant with NFPA 2112 and ASTMF 1506, EN11612, EN1149 5 standards.
- Material: Garment made from 100% genuine DuPont™, Nomex® IIIA Fiber Composition 93% Nomex®, 5% Kevlar®, 2% P-140 (antistatic fibers) Tested as per: EN ISO 11612: 2008A1 B1 C1 & EN1149(5): 2008.
- Certifications: NFPA 2112 and ASTMF 1506, EN11612, EN1149 - 5 standards

Color Options: Red, Royal Blue, Navy Blue & Beige

Origin: India

NAUTILUS FR - PYROVATEX - COTTON COVERALL

Model No.: NTLS FR 26

Description:

- 100% cotton 260 gsm twill 3/1 weave, made from combed yarn for smooth feel and better tensile strength. Dyed with high quality reactive dyes and chemical treated for FR resistance. Fabric tested under method EN470-1 EN ISO11612: 2015 A1B1C1F1 meets ATPV 4 class-1.
- 100% cotton FR treated full sleeve with adjustable Velcro.
 Coverall with 2 way auto lock brass concealed zip with centre
 button, two diamond shaped chest pockets with flap & button,
 two front cross pockets two back patch pockets, 1 back tool
 pocket, sleeve pocket, front stitch on crease, with 1" reflective
 tapes, hang loop, elastic waist band, hang loop.
- · Material: FR Pyrovatex Cotton 260 gsm
- Conforms to EN470-1 EN ISO11612: 2015 A1B1C1F1 Meets ATPV 4 class-1

Color Options:

· Red, Royal Blue, Navy Blue, Orange, Green & Beige

Origin: India

PULL-ON FIRE FIGHTERS BOOT

Model No.: NTLS 3994

Description:

- Upper: Buff Din FR Leather 1.8-2.0 mm; FR thread
- Vamp+Quarter Lining: Skin-fit 5 mm Foam + Backer; Satin reinforcement
- Vamp+Quarter Padding : PU foam 9 mm Density 54
- Toe Cap: Composite; Supa Foam 3.5 mm padding; dual Silizium overcap
- Reflector : 3M FR Tape Yellow + Orange
- Insole : Anti-static; 2 mm leather board counter stiffener
- Sole : FR Vulcanised Neoprene with 1100N mid plate
- Sizes: 38 to 47
- Option: NTLS 3995 with zip

Origin : India



NAUTILUS PERMANENT HEAT AND FLAME RETARDANT COVERALL

Model No.: NTLS CNR 45 Description:

- Seven pockets design, Lenzing German Aramid and inherently static Resistant carbon fibers, All metal parts concealed, 1" reflective tape provided, Pass-Through side openings with snap closure for access to inner clothing, Fabric weight 150 gms/sq.mtr
- Material: 93% Meta Aramid, 5% Para Aramid and 2% Antistatic inherently flame and static Resistant carbon fibers
- Features: Excellent wicking and soft skin feel Tested in USA.
- · Conforms to NFPA 2112: 2012, ASTM D6413: 08

Color Options: Red & Blue

Origin : China

NAUTILUS PROXIMITY SUIT

Model No.: NTLS PS50

Description:

- The proximity suit is a single-layer lightweight aluminized suit intended for industrial applications where workers need radiant heat protection in addition to protection from sparks, splatter, flame and molten metal splash. The proximity suit is fabricated without bulk insulation or lining for superior flexibility and freedom of movement. The proximity suit can be used in a wide range of industries and applications including in metal processing operations, work near furnaces, aerospace industry, and environments where workers need radiant heat protection. All proximity suits are designed to be worn over standard industrial work wear. It is important for users to wear long-sleeve shirts and pants made with non-flammable fibers.
- Heat and projection resistant exterior. To be worn with aluminized hood and gloves
- · Material : Aluminium perox para-aramid fabric
- Weight : 520 gsm
- · Conforms to EN531, A, B2, CS, D2, E3

Color Option : Aluminium

Origin: China

NAUTILUS - CHEMTEC CHEMICAL PROTECTIVE CLOTHING

Model No.: NTLS 21FR CHEMTEC 1000FR ASTM (CATEGORY III) Description:

 Single piece coverall with elasticated hood and cuffs, with the benefit of low cost and comfortable softness, plus major advances in microporous technology provides additional protection for dust protection, splash and spray resistance against liquid and Flame Retardant Protective Clothing.

Features :

- Multi layers SMMS fabric improves the fabric strength and filtration and make the coverall more durable.
- Passes EN1149-5 for antistatic property.
- Passes EN1073-2 for protection against radioactive particulate contamination.
- Passes EN ISO 14116 Index 1/0/0 for protection against occasional and brief contact with sparks and small flames.*
- According to EN ISO 14116 Index 1, the limited flame spread coverall must never be in direct contact with skin.
- Chemtec 1000FR must be always worn on top of index 2 or 3 garments and hoods.
 - *The seams, elastics and zipper components are not made of flame retardant materials and may burn if exposed to heat and flame.
- Conforms to: NFPA 701: 1 and 16CFR-1610 Class 1
- Tested to: ASTM D751-06 R2011 ASTMD5733-99 ASTM D2582 ASTM D4157-13.











NAUTILUS JACKET & PANT

Model No.: NTLS JP280

Description:

- Jacket with two breast pockets with zip, two side pockets, pen pockets on sleeve. Trouser with two side pockets, one back pocket and two thigh pockets, elasticated waist band.
- · Strictly Observe Washing Instructions · Material: 100% High Quality Cotton · Weight : 280 gsm Twill Weave Fabric · Conforms to SGS & EN340: 2003 Standard.

Color Options: Light Blue / Dark Blue, Beige, Yellow

Origin: India



Model No.: STDY CT220PS

Description:

- · Shirt with two chest pockets, one with flap and button, two pockets on bottom. Trouser with two side pockets, two back pockets, elasticated waist band, one front button and nylon zipper. All stress points are reinforced with bar tacks.
- · Strictly Observe Washing Instructions

Material: 100% cotton · Weight : 220 gsm

 Conforms to SGS & EN340 : 2003 standards Color Options: Petrol Blue, Navy Blue, Royal Blue, Orange, Red, Yellow, White, Beige (Khaki), Grey

Origin: China



Description:

STURDY 65/35 POLY COTTON PANT AND SHIRT

Model No.: STDY PS170

- Shirt with two breast pockets, one with flap and button, two pockets on bottom, pen pocket on sleeve. Trouser with two side pockets, one back pocket, elasticated waist band, with one front button and two way nylon zipper, all stress points are reinforced with bartacks.
- Strictly Observe Washing Instructions
- Material: 65 / 35 Poly Cotton

· Weight : 170 gsm

Conforms to SGS & EN340: 2003 Standards. Color Options: Petrol Blue, Navy Blue, Royal Blue, Orange, Red, Yellow, White, Beige (Khaki), Grey

Origin: China



Model No.: STDY LB170

Description:

- · Front buttons type and with three pockets, one breast pocket and two side pocket, all stress points are reinforced with bar tacks.
- · Strictly observe washing instruction

 Material: 65 / 35 polycotton • Weight : 165-170 gsm

Conforms to SGS & EN340 : 2003 standard.

Color Options: White, Light Blue, Dark Blue

Origin: India



STURDY 100% COTTON COVERALL

Model No.: STDY CT220 Description:

- · Double stitch on shoulder, side seam and seat. All stress points are reinforced with bartacks, elasticized waist band, two pockets on the chest with left pocket fitted with zip, two side pockets closures with velcro stitched inside two back pockets one with zip, pen pocket on left sleeve.
- Strictly Observe Washing Instructions

Material: 100% cotton Weight : 220 gsm

Conforms to SGS & EN340: 2003 Standards.

Color Options: Petrol Blue, Navy Blue, Royal Blue, Orange, Red, Yellow, White, Beige (Khaki), Grey

Origin: China

STURDY 65/35 POLYSTER COTTON COVERALL

Model No.: STDY PC160

Description:

- · Double breast pockets, one with flap and button, two side two back patch pockets, pen pockets on left sleeve, two way nylon zipper with placket and elastic waist. All stress points are reinforced with bartacks.
- Strictly Observe Washing Instructions
- Material: 65 / 35 Polyester Cotton

Weight : 155-160 gsm

· Conforms to SGS & EN340: 2003 Standards. Color Options: Petrol Blue, Navy Blue, Royal Blue, Orange, Red, Yellow, White, Beige (Khaki), Grey

Origin: China



NAUTILUS "CLASSIC" COTTON COVERALL

Model No.: NTLS CL280

Description:

- · Double chain stitch on shoulder, side seam and seat. All stress points are reinforced with bartacks, elasticized waist band in back, two breast pockets, two side pockets, one pen pocket on the left sleeve, sleeves cuffs fitted with velcro. Average shrinkage 2-3%.
- · Strictly Observe Washing Instructions

· Material: 100% cotton

Weight : 260~280 gsm twill weave fabric

· Conforms to SGS & EN340: 2003 standard.

Color Options:

· Light Blue, Dark Blue, Royal Blue, Beige, Yellow, Orange, White, Grey, Red

Origin: India

STURDY BIB PANT

Model No.: STDY BP260

Description:

- · Double stitched, adjustable shoulder straps, breast pocket with zip fitted, two side pockets, all stress points are reinforced with bar tracks.
- · Strictly observe washing instruction

Material: 100% cotton · Weight : 260 gsm

· Conforms to SGS & EN340: 2003 standard.

Color Options: Beige, Orange, Dark Blue, Light Blue Red, Dark Grey, White, Yellow, Green

Origin: India





NAUTILUS COTTON THERMAL COVERALL

Model No.: NTLS TC 175

Description:

 Insulation of Recron 175 gsm and inner layer of nylon double stitched with brass zip, side access pocket with zip and multiple pockets on chest, back, sleeve, knee and head covering hood available in orange color.

· Strictly Observe Washing Instructions

Material: Cotton fabric with insulation of 175 gsm polyester

Color Options: Orange

Origin: India



NAUTILUS WINTER JACKET

Model No.: NTLS WJ-01

Description:

 Navy Blue stain resistant, water and wind cheater showerproof polyester fabric with reflective piping laced detachable hood; two chest pockets; two side pockets. Two way heavy duty zip under button down placket.

· Material: 100% polyester

• Conforms to ISOEN 342 : 2004, ISOEN 14058 : 2004, ASTM ISEA 201 : 2010

Color Options: Navy Blue

Origin : India

Cat 2



STURDY SAFETY WETBOOT

Model No.: STDY 163

Description:

Metal Free

• 100% Waterproof bonded to the Sole

Comfort and breathes.
 Triple Stitched to the vamp

 Cushioned and Skid Resistant tested to ASTM 2913

Sweat Absorption

Vamp : Rubber

Upper : Real Suede Leather

Sole : Rubber
Lining : Cambrella
Insert : 400 gsm Thinsulate
Laces : Braided matching

• Collar : Rubber Foam with ankle protection

Toe Cap: 200 joules Composite toe cap for extra safety in Electrical use
 Midsole: 1200 Newton ASTM compliant non-woven fabric; light, flexible,

rust free

· Optional: Extra-long with Lace Loops to open the collar wide

• ASTM F 2412/F2413 MI/75 C/75 + ASTM 2913

Origin: China

NAUTILUS ALASKA GREEN COVERALL

Model No.: NTLS TWC-AG320

Description:

Designed for Protection in Cold Weather Category 4

 Options: One way side zip on leg from ankle to under the side pocket for oilfield workers to easily remove while still wearing boots.

Slit behind side pocket to access trouser pocket.

 Conforms to ISOEN 342: 2004 - Ensembles and garments for protection against cold
 ISOEN 14058: 2004 - Protective clothing.

Garments for protection against cool environments ISOEN 471: 2003 - Specification for high visibility

warning clothing.

ASTM 3776: 96 & ASTM ISEA 201: 2010 Cat 4

· Strictly Observe Washing Instructions

Color Option : Alaska Green

Origin: China

NAUTILUS WINTER JACKET

Model No.: NTLS WJ-10

Description:

 Nautilus Brand Winter Jacket 100% polyester oxford bomber, showerproof and wind resistant, concealed hood with drawstring, elastic ribbed waist and wrists for added snug comfort two slash pockets, one - two pencil pocket on left sleeve, fully tape seamed.

· Material: 100% polyester

 Conforms to EN471 + EN343 Class 3:1, ASTM 207 Class III, EN511 Thermal Class 4

Color Options: Fluorescent Yellow, Orange

Origin: China



NAUTILUS WATER RESISTANT HIGH ANKLE SAFETY BOOT

Model No.: NTLS 169 S3 TPU

Description:

· Leather Upper: Splash Resistant Brown Micromesh leather

Vamp : TPU waterproof vamp bonded to PU/Rubber outer sole
 Sole : Oil / Chemical / Heat resistant PU/Rubber outer sole with shock absorbing heel

Anti-Puncture: Rust resistant Steel Midsole ASTM 1200N

Conforms to ASTM F2412/F2413 MI/75 CI/75 + ASTM 2913

Origin: China





NAUTILUS NEOPRENE FACE MASK FOR GENTS

Model No.: NTLS 001M

Description:

 For protection against strong winds in sub-Zero temperatures. Keeps the face warm with a soft feel in Blizzard winds. This material is also used for diving skin suits.

Material: Neoprene Color Option: Black Origin: China



BALACLAVA

Description:

· Whole knitted Balaclava

· The material is Polywool.

Color Option: Navy Blue

Origin: India



NAUTILUS NEOPRENE THERMAL GLOVES

Model No.: NTLS 004CR

Description:

- · For protection against strong winds in sub-Zero temperatures. This glove is designed to remain waterproof and pliable while giving adequate protection even at temperatures -40°F
- Suitable for deep diving for extended periods in frigid waters

 Size: L & 2 XL Color Option: Black Origin: China



NAUTILUS NEOPRENE FACE MASK FOR LADIES

Model No.: NTLS 002F

Description:

 For protection against strong winds in sub-Zero temperatures. Keeps the face warm with a soft feel in Blizzard winds. This material is also used for diving skin suits.

Material: Neoprene Color Option: Black Origin: China



STURDY WINTER GLOVES

Model No.: STDY WG 30

Description:

· Material: Rubber shell, water proof, acrylic

lining which covers cuff edge

• Length : 28 cm Size : 10 / 11 inches

Color Option: Fluorescent Orange

Origin: China



STURDY HI VIS BRIGHT YELLOW GUMBOOT

Model No.: STDY 901 S5 SRC

Description:

Toe Cap: Steel rust proofed - 200 joules

: Anti-skid design with deep lugs and ladder lugs in middle of sole Acid, Alkali and Heat Resistant Nitrile sole

· Midsole: Non-woven - 1200 Newton · Thickness of bottom: 8-11 mm

Thickness of top : 1.9-2.2 mm Thickness of sole : 6.9-7 mm not including lugs thickness:

Height: 38 cm : 2 kg Weight

: Removable Felt Liner Option

Standard: ASTM F2412/F2413 MI/75 C/75 PR with ASTM F-2913 skid resistance

Conforms to Meets or exceeds CE 20345: 2011S5 SRC

Color Option: Yellow Origin: China

NAUTILUS TURTLE SHELL GLOVES



Seamless construction

processed with premium materials to deliver softer, more comfortable, and high

ATTRIBUTE	S :	
Shell		13G HPPE/Fiberglass/ Stainless Steel
	Finish	Textured, non-tacky
	Weight	Light Weight
Coating	Breathability	Excellent
	Flexibility	Excellent
	Grip	Dry, oil or wet
TPR		Soft, high impact resistance, environmental
Sizes		6/XS through 12/XXXL



Our China associates are a Professional PPE company with strong researching and developing ability. Their operation team is composed of a group of outstanding people who are familiar with textile and trade business. Meanwhile, they have a long and stable co-operation with Donghua University, the TOP textile university over the world, which makes them updated with the most advanced textile techniques and information. Moreover, they invited the Senior Professors from Donghua University as their technical advisers and researchers to provide scientific and effective service for their customers.

Innovation intertwined with safety. This gloves is tightly knit with strong yet extremely dexterous fibers that offer industry leading cut protection and abrasion resistance. A seamless series that answers the call of duty for most jobs, these high comfort knit gloves features consistent sizing and fit across the line, with a variety of palm coatings and especially the unique and premium TPR process which makes our gloves highly competitive, widely applied for sanitation, maintenance, wood/metal working and construction, oil, gas and mining.

CERTIFICATION : ANSI/ISEA CUT A6



Knit wrist helps prevent dirt and debris from entering the glove



STURDY HIGH IMPACT RESISTANT WELDING HELMET

Model No.: STDY 760

Description:

· Beautiful design and full range protection.

· High impact resistant PP shell, with headgear H-71A.

• Lift up window style, size: 2 inch x 41/4 inch

Conforms to EN175: 1997 Z87.1-2003

Color : Black
Origin : Taiwan



STURDY HANDY WELDING VISOR

Model No.: STDY 703

Description:

- Economic, handy welding visor
- · PP shell, handle outside
- Fixed window, size: 2 inch x 41/4 inch
- · Lens excluded
- Conforms to EN175: 1997 Z87.1-2003

Origin: Taiwan



NAUTILUS VENTILATED WELDING GOGGLE

Model No.: NTLS WG208

Description:

· Lens: Green PC Lens

· Frame : Green Soft PVC Frame

• Lens Options : Shade #5 or Shade $\overline{*}11$

 Features: Indirect ventilation, Economic Welding Goggle

· Conforms to ANSI Z87.1-2020 standard

Origin: Taiwan

NAUTILUS FLIP TYPE WELDING GOGGLE

Model No.: NTLS WG205 - FLIP UP

Description:

 Frame: Lift front style, indirect vents, Green PVC frame, black ABS lens frame

 Features: High quality universal welding goggle soft secure face fit

 Conforms to: CE EN 175 & ANSI Z87.1-2020

Origin : Taiwan



STURDY CLIP CAP WELDING HELMET

Model No.: STDY 770

Description:

• Clip - Cap welding helmet, lift up front window, size: 2 inch x 41/4 inch (safety helmet not inclusive)

- · Easy assemble with helmet.
- · Connector attached.
- Conforms to EN175: 1997 Z87.1-2003

Color : Black
Origin : Taiwan

COBALT BLUE WELDING & FURNACE VIEWING GOGGLE

Model No.: NTLS CTWG 9711

Description:

Cobalt Blue Glass has special properties
that both allow you to see better into extremely
bright furnaces and allow you to see more clearly
and with more contrast the objects you're working on.

 Cobalt Blue does not normally protect from invisible Infrared radiated heat.

 CTWG Lens is specially formulated to DIN spec and tested to EN 166 + EN 169 CE IR5 to provide radiated protection

Origin: China

NAUTILUS FLIP TYPE WELDING GOGGLE

Model No.: NTLS WG209 - FLIP UP

Description:

· Lens: Green PC Lens

 Frame: Lift front style, Indirect vents, Green PVC Frame, Black ABS Lens Frame

· Lens Options: Shade #5 or Shade #11

· Features : Indirect ventilation, Economic Welding Goggle

· Conforms to ANSI Z87.1-2020 standard

Origin: Taiwan

NAUTILUS WELDING GOGGLE

Model No.: NTLS WG206

Description:

 Frame: Indirect vents, Green PVC Frame, Black ABS Lens Frame

 Features: High quality universal welding goggle soft secure face fit

 Conforms to CE EN 175 & ANSI Z87.1-2020

Origin : Taiwan





Spatter Resistant Lens CR 39

Cobalt Blue Lens

Welding Magnifying Lens











NAUTILUS GAS WELDING SPECTACLE

Model No.: NTLS 1090 IR5

Description:

- Revolutionary safety spectacle showcases the maximum safeguard against eye injuries
- Extraordinary 9.75 curved lenses provide more than 180 degree of coverage, without the distraction of seams or traditional type side shields
- 4 points adjustable temples
- Semi-frame and slim temple design creates a spectacle that weights only 27 grams per pc.
- Special nose-buds secure the glass to your face without slipping, while providing a pillow soft fit
- · High impact resistance and anti-scratch lens
- · Lenses provide 99.9% of UV protection
- Lenses provide protection against infra-red radiation from a bright flame when gas welding
- · Green shade 5 assists the gas cutter welder in seeing the weld clearly
- Meets: ANSI Z87.1-2020, CE EN166: 2001, AS 1337

Lens Option: Green tinted lens

Origin: Taiwan

NAUTILUS LEATHER WELDING GLOVES

Model No.: NTLS WG 16

Description:

· Material : Heat-resistant split leather palm with cotton

fleece lining Welted type

Color : RedSize : 16 inches

Cut Resistance Level B
Conforms to EN388 & EN420

Origin: Pakistan



EN 388: EN 420: 2017 2003+A1: 2010

NAUTILUS WELDING JACKET

Model No.: NTLS WDJ

Description :

· Length 13", buttons at front, kevlar thread stitching

Material : Split leatherColor : Light grey

Conforms to SGS & EN 470-1 standard

Origin: Pakistan



NAUTILUS WELDING LEG GUARD

Model No.: NTLS WLG40

Description:

Knee length velcro closure with elastic loops under shoe covers.

Material : Split leatherColor : Light grey

• Conforms to SGS & EN 470-1 standard

Origin: Pakistan

NAUTILUS RIGGER BOOT

Model No.: NTLS 463 S3 (Double Density PU Nitrile)

Description:

• Leather : Cherry Brown Water Repellent

Lining : Soft FabtexSole : Nitrile

Features: Pull on type, padded socks, oil, acid and heat resistant Nitrile sole. Puncture

resistant steel plate 1100 Newton, stitched with fire retardant thread

· Toe Protection: 200 Joules

• Option : Also available in Black / Tan

• Sizes : 38 to 46

· Conforms to EN20345: 2011 Standard

Origin: India



NAUTILUS SAFETY GOGGLE

Model No.: NTLS GIV1200 IR5

Description:

- Indirect-vent frame provides protection against splash and dust
- Soft vinyl goggle body conforms to facial contours for a very comfortable fit
- · High Impact resistance against flying particles
- Optically correct polycarbonate lens
- Fits over prescription glasses
- · Fully adjustable elastic band
- Polycarbonate lenses filter out more than 99.9% of harmful UV radiation
- Meets: ANSI Z87.1-2020 & CE EN166: 2001 standards

Lens Options: Clear/Dark Anti-fog Lens, IR3, IR5, Anti-fog Dual Lens

Origin: Taiwan

NAUTILUS TIG WELDING GLOVES

Model No.: NTLS TW 15

Description:

Material : Goatskin full grain leather palmCuff Type: Cowhide split leather cuff

Cull type: Cowflide spi
 Color : Red / White
 Size : 15 inches

• Conforms to EN388, EN407 & EN420

Origin: Pakistan



EN 388 : 2017





NAUTILUS WELDING APRON

Model No.: NTLS WA24/36

Description:

 46" x 23" Welder's Apron with neck and chest loop and huckle

Material : Split leatherColor : Light grey

• Conforms to SGS & EN 470-1 standard

Origin: Pakistan



NAUTILUS WELDING HAND SLEEVES

Model No.: NTLS WHS60

Description:

• Full arm's length shoulder to cuff, loop with snap buckle.

Material : Split leatherColor : Light grey

Conforms to SGS & EN 470-1 standard

Origin: Pakistan



STURDY HIGH ANKLE SHOE

Model No.: STDY 399W S1 P

Description:

· Leather : Black Full Grain Action Leather Upper

• Lining : Soft Fabtex

Sole : Dual Density PU with RubberFeatures : Anti-static Steel Toe, Steel plate,

Velcro Style. Puncture resistant steel plate 1100 Newton.

• Toe Protection: 200 Joules

• Option : Also available in SB, S1 & S1P side buckle; FR thread

• Sizes : 38 to 48

Conforms to EN 20345 : 2001 Standard

Origin : China





NAUTILUS CHEMICAL SUIT

Model No.: NTLS CS320

Description:

· Chemical proof (refer our chemical chart), flame retardant, jacket and trouser, jacket with heavy duty zip under five button placket, trouser with elasticated waist.

Strictly observe washing instruction

Material: PVC with all welded seams

 Weight: 320 g/m2 Color : Green

Meets SGS & EN 465, EN 466 standard

Origin: China

STURDY YELLOW RAINCOAT

Model No.: STDY RAINCOAT

Description:

· Hi Vis Yellow Raincoat with attached hood. Concealed elastic double cuff; plastic zip under protective placket

Material: 0.32 mm PVC with polyester lining for skin comfort

Yellow

EN 13034 Type PB6 - low risk; limited protection against liquid chemical splash

(PB = Partial Body Protection)

Origin: China

NAUTILUS PVC CHEMICAL RESISTANT APRON

Model No.: NTLS CA550

Description:

· Waist to neck height with cut outs for shoulders. Adjustable neck and shoulder loops.

Material: Anti-acid flame retardant

Weight : 550 gsm

Color : Reddish Orange / Green Conforms to SGS & EN 467 standard

Origin: China

NAUTILUS SAFETY GOGGLE

Model No.: NTLS GIV1200

Description:

- · Indirect-vent frame provides protection against splash
- Soft vinyl goggle body conforms to facial contours for a very comfortable fit
- High Impact resistance against flying particles
- Optically correct polycarbonate lens
- Fits over prescription glasses
- Fully adjustable elastic band
- Polycarbonate lenses filter out more than 99.9% of harmful UV radiation
- Meets: ANSI Z87.1-2020 & CE EN166: 2001 standards

Lens Options: Clear/Dark Anti-fog Lens, IR3, IR5, Anti-fog Dual Lens

Origin: Taiwan

NAUTILUS - CHEMTEC CHEMICAL DISPOSABLE COVERALL

Model No.: NAUTILUS CHEMTEC ULTITEC 2000-CT

Description:

- Single piece coverall with elasticated hood and cuffs, with the benefit of low cost and comfortable softness, plus major advances in microporous technology provides additional protection for dust protection, splash and spray resistance against liquid and aerosol hazards compared to a traditional coverall.
- Category 1: Category 1 is a gas-tight chemical protective suit with an internal independent breathing air supply, such as a self-contained breathing apparatus, used where there is an immediate danger to life and health (IDLH), immediate skin hazard or contamination hazard, or unknown atmosphere.
- Category 2: Category 2 is a gas-tight chemical protective suit with an external independent breathing air-supply, used for responding to an IDLH hazard where the atmosphere is known, and not likely to contaminate the breathing apparatus.
- Category 3: Category 3 is liquid-tight full body chemical protective clothing, used in non-IDLH atmosphere where the main hazard is from contact with liquid or splash.
- Category 4: Category 4 is liquid spray-tight full body chemical protective clothing, used in non-IDLH situations where there is a potential for splash from liquids that are not immediately hazardous to the skin.



Model No.: NTLS CC320

Description:

- Chemical proof (refer our chemical chart), closed neck with laced hood, zip front with five button covered placket, elasticated sleeve and trouser cuffs concealed under extended sleeve, extra sizing (6XL) for wearing over clothing
- Strictly observe washing instruction
- Material: PVC with all welded seams
- Weight : 320 g/m2 Color : Green
- Meets SGS & EN 465, EN 466 standard

Origin: China

STURDY RAIN SUIT

Model No.: STDY RAIN SUIT

Description:

- · Hi Vis Yellow Jacket & Trouser set with detachable hood
- Concealed elastic double cuff
- Plastic zip under protective placket 0.32 mm PVC with polyester lining for skin comfort

EN 13034 Type PB6 – low risk; limited protection against liquid chemical splash

(PB = Partial Body Protection)

Origin: China

4SITE SAFETY GUMBOOT

Model No.: 4SITE 301 S5 SRC

Description:

- Upper Material: 100% PVC
- Lining : Quick Drying, Synthetic Fiber
- Toe Cap: 200 Joules CE
- Midsole: 1100 Newtons CE Direct Injection PVC SRC rated Sole
- Height: 395 mm including heel
- Thick : 4.5 mm - 2.0 mm
- Colour : Green upper with black sole
- : 38 to 48
- Conforms to CE EN 20345 : 2011

Color Option: Green Origin: China

NAUTILUS CHEMICAL SAFETY GOGGLE

Model No.: NTLS CHG204

Description:

- · Economic Safety Goggles Soft PVC frame
- PC lens, Indirect vents on top and bottom
- Liquid chemical splash, Dust and impact
- Size: 15(W) x 7.5(H) cm
- Lens also available with anti-fog treatment
- Conforms to CE EN166: 2001 or ANSI Z87.1-2020

Origin: Taiwan





Category 6: Category 6 is limited spray-tight, full or partial body chemical protective clothing that offers protection for a particular part of the body from liquid penetration, such as protection for medical personnel from bloodborne pathogens.

Within each category there are multiple performance levels for most properties. This is consistent with the approach used in the European (CEN) and international (ISO) standards communities, and is one of the first attempts to harmonize testing and labelling of chemical protective clothing worldwide

- Material: Spun bonded polypropylene nonwoven laminated with microporous film.
- Weiaht 63 asm
- Natural / White Color
- Conforms to EC Directive 89/686/EEC, Category 3, Type 5, 6.

Origin: Taiwan





NAUTILUS "PREMIUM" COTTON COVERALL

Model No.: NTLS PM280

Description:

- Full back elastication and action back for comfort. Concealed two way metal zip, Tunnel elasticated waistband, two large back pockets, one zipped. Rule pocket on right leg, two large pockets with side access, tool pocket and hammer strap, pen pocket on left sleeve, two zipped breast pockets. Average shrinkage 2-3%.
- Strictly Observe Washing Instructions
- · Material: 100% high quality cotton
- Weight : 280~320 gsm twill weave fabric
 Conforms to SGS & EN340 : 2003 standard.

Color Options: Dark Grey, Orange, Navy Blue

Origin: India



Model No.: STDY 120 TNR3

Description:

- Fabric: 100% polyester tricot, 2 shoulder one horizontal normal reflective tape, vertical stripes on each shoulder one horizontal stripe on chest, Vinyl ID pocket on the chest with velcro.
- · Fabric Weight: 120 gsm
- · Color: Fluorescent Yellow / Orange
- Packing: Each vest in an individual polybag, 100 vests in a master carton of each color and size.
- · Conforms to EN 340, ANSI Class II, CSA Z96.2 Class- II

Origin: China

NAUTILUS HIGH VIS SAFETY VEST

Model No.: NTLS 120 THR4

Description:

- Fabric: 100% polyester tricot, 4 stripes, two inch high reflective tape, vertical stripes on each shoulder, two horizontal stripes on chest and the abdomen, Vinyl ID pocket on the chest with velcro.
- · Fabric Weight: 120 gsm
- · Color: Fluorescent Yellow / Orange
- Packing: Each vest in an individual polybag, each size in a separate carton, 100
 vests in a master carton.
- · Conforms to CE EN340, EN471 & Meets ASTM-207 Class III Standard.

Origin: China

NAUTILUS HIGH VIS SAFETY VEST

Model No.: NTLS 120 THR 6ZS

Description:

- Fabric: 100% polyester tricot, 6 stripes, two inch high reflective tape, vertical stripes on each shoulder, two horizontal stripes on chest and the abdomen, one stripe on sleeves.
 Vinyl ID pocket on the chest with Velcro.
- Fabric Weight : 120 gsm
- Color : Fluorescent Yellow
- Packing: Each vest in an individual polybag, each size in a separate carton, 100
 vests in a master carton.
- Conforms to CE EN340, EN471& Meets ASTM-207 Class III Standard.

Origin: China

STURDY SAFETY VEST - NET TYPE

Model No.: STDY 100 MNR3

Description:

- Fabric: 100% polyester net, 2 shoulder one horizontal normal reflective tape, vertical stripes on each shoulder one horizontal stripe on chest, Vinyl ID pocket on the chest with velcro.
- · Fabric Weight: 100 gsm wide mesh net
- · Color: Fluorescent Yellow / Orange
- Packing: Each vest in an individual polybag, 100 vests in a master carton of each colour and size.
- · Conforms to EN 340, ANSI Class II, CSA Z96.2 Class- II

Origin: China

NAUTILUS SAFETY VEST TRICOT

Model No.: NTLS 120 THR 3 ZL with Loops Description:

- One side loop for key holding and other two side loops for flash light (Torch). Two pocket at the bottom and one ID transparent chest pocket.
- Fabric: 100% polyester tricot. Two inch reflective tape, vertical stripes on each shoulder and one horizontal stripe on the abdomen.
- · Fabric Weight: 120 gsm
- · Color: Fluorescent Yellow / Orange
- Packing: Each vest in an individual polybag, 100 vests in a master carton of each color and size
- · Conforms to CE EN471 STANDARD, ANSI 107

Origin: China

NAUTILUS SAFETY VEST TRICOT

Model No.: NTLS 120 MSR 4Z

Description:

- Fabric: 100% polyester high quality net. 4 stripes, two inch high reflective tape, vertical stripes on each shoulder, two horizontal stripes on chest and the abdomen, mobile pocket on the chest with velcro, two pocket at the bottom.
- · Fabric Weight: 120 gsm
- · Color: Fluorescent Yellow
- Packing: Each vest in an individual polybag, each size in a separate carton, 100
 vests in a master carton.
- Conforms to CE EN340, EN471

Origin: China

STURDY DUST HOOD

Model No.: STDY DH

Description:

Material: 100% cotton

• Weight: 190 gsm

Color Options: Light Blue, Dark Blue, Beige, Yellow

Origin : China

STURDY DISPOSABLE COVERALL

Model No.: STDY DC-50

Description:

- Closed neck with laced hood, zip front under five button covered placket, elasticated sleeve and trouser cuffs, concealed under extended sleeve, extra sizing available for wearing over clothing.
- · Material : Non-woven synthetic fabric
- Weight : 50 gsmColor : White
- Conforms to SGS & EN 340 standard

Origin: China



AND DESCRIPTION OF REAL PROPERTY.





NAUTILUS YELLOW HEAVY DUTY GLOVES

Model No.: NTLS HDL105

Description:

• Material : Cowhide split leather AB grade

heavy duty gloves, yellow drill cotton canvas back and cuff, palm with cotton fleece lining

rubberised cuff.

: Grey with Green Patch and Color

Yellow Cotton Drill Cloth

• Size : 10.5 inches Conforms to EN388 & EN420 Origin: Pakistan / China



NAUTILUS LEATHER WELDING GLOVES

Model No.: NTLS WG 16

Description:

· Material : Heat-resistant split leather palm

with cotton fleece lining Welted type

· Color : Red • Size : 16 inches · Cut Resistance Level B

· Conforms to EN388 & EN420

Origin: Pakistan





NAUTILUS DRIVERS LEATHER GLOVES

Model No.: NTLS 410

Description:

· Material : Made buffalo crust leather

: Grey Color : 10.5 inches • Conforms to EN388 & EN420

Origin: Pakistan





NAUTILUS TIG WELDING GLOVES

Model No.: NTLS TW 15

Description:

Material: Goatskin full grain leather palm

· Cuff Type: Cowhide split leather cuff

: Red / White Color Size : 15 inches

Conforms to EN388, EN407 & EN420

Origin: Pakistan









STURDY PVC DOTTED GLOVES

Model No.: STDY PD 12

Description:

· Material: Drill Cotton with PVC dots on palm,

thumb and index, knitted wrist

• Weight : 8 oz / 10 oz / 12 oz / 14 oz

· Cuff Type: Elastic Cuff · Color : Cuff: Red

Palm: Black / Beige

 Size : 9 / 10 inches Origin: Pakistan / China



STURDY COTTON KNITTED GLOVES

Model No.: STDY KC65

Description:

• Material : Knitted Glove 100% Cotton

· Weight : 65 gms · Cuff Type: Elastic Cuff · Color Natural Size : 9 inches

Origin: Pakistan / China



STURDY NITRILE DIPPED GLOVES

Model No.: STDY NDG 10

Description:

· Material: Nitrile coating on jersey cotton

support ventilated back, knitted wrist

 Cuff Type: Elastic Cuff Color : Blue / White Size : 10 inches

Origin: China



STURDY NITRILE DIPPED CANVAS CUFF GLOVES

Model No.: STDY NDGC 10

Description:

Material: Dipped glove, nitrile coating

on jersey cotton support, 6 cm canvas cuff

 Color : Blue / White • Size : 10 inches

Origin: China



STURDY VINYL GLOVES

Model No.: STDY VGP 01

Description:

· Material: Box of 100 disposable gloves,

powdered vinyl, suitable for food processing

 Color : Natural Size : S/M/L/XL

Origin: China



STURDY LATEX GLOVES

Model No.: STDY LG 02

Description:

 Material: Box of 100 disposable gloves, powdered /

unpowdered latex gloves

Color : Natural : S/M/L/XL Size

Origin: China





STURDY HEAVY DUTY RUBBER GLOVES

Model No.: STDY HD 27

Description:

· Material : Heavy Duty Rubber Gloves, thicker

gauge for superior protection against abrasion, increased resistance against tear and puncture, excellent dexterity for a heavy duty glove, cotton reinforced, CE Food Safe

 Color : Black, Orange : L / XL / 2XL Size

Origin: China



Model No.: NTLS KP101

Description:

• 15 x 25 cm with Velcro closures, heavy duty, rubber material, anti-slip, anti-punch, flexible rubber knee pads.

Material: EVA Foam Weight : Light Weight · Color : Orange

Origin: Taiwan





STURDY FLOCK LINED NITRILE GLOVES

Model No.: STDY 15 & 18

Description:

- · Nitrile for reliable solvent resistance
- · Pure cotton flock lining to absorb perspiration
- · Anti-slip pattern for good grip in wet and dry conditions
- · Improved sensitivity and dexterity
- Straight cuff
- · Free of extractable proteins
- · Compliant with FDA regulations for use in repeated contact with food (blue and green colors)
- Manufactured under a stringent quality management system

• Size: 15 / 18 inches

Origin: China

STURDY LATEX COATED GLOVES

Model No.: STDY LC 201

Description:

Color

· Material: Cotton polyester natural coated palm and fingerstrips, Gauge 10 Crinkle Finish

: Blue

: 10 inches

· Conforms to EN388 & EN420

Origin: China



i (max)





SAFETY SIGN




























































Model No.: NTLS ZHB



MARINE SPARES

NAUTILUS STANDARD HULL ANODES

ALUMINIUM HULL ANODES



Anode Type	Anode Body (mm) Mean Dimension		Core (mm) Mean Dimension			Weight (kg)		
	L	W	D	L	W	D	Net	Gross
ZHW 037	200	95	33	300	25	6	3.2	3.7
ZHW 043	220	115	30	320	25	6	3.9	4.3
ZHW 055	300	90	40	400	25	6	5.1	5.5
ZHW 106	320	160	35	420	30	6	10.0	10.6
ZHW 133	390	155	36	490	40	8	12.0	13.3
ZHW 160	520	120	40	620	40	6	14.8	16.0
ZHW 198	580	140	40	680	40	8	18.0	19.8
ZHW 232	550	130	50	650	40	- 8	21.5	23.2
ZHW 253	600	150	50	700	50	- 8	23.1	25.3
ZHW 290	550	135	65	650	50	8	27.0	29.0
ZHW 366	590	152	70	750	50	8	34.1	36.6
ZHW 472	920	160	60	1020	40	8	44.6	47.2


Model No.: NTLS AHW



Model No.: NTLS ZHW



NAUTILUS STANDARD BOLT-ON ANODES



Anode Type		Anode Bo Mean Dir			Weight (kg)		
	L	w	T	HC	Net	Gross	
AHB 018	200	100	30	110	1.4	1.8	
AHB 021	200	100	40	110	1.6	2.1	
AHB 032	300	150	25	160	2.8	3.2	
AHB 037	300	150	30	160	3.3	3.7	
AHB 051	300	150	40	160	4.7	5.1	





STURDY POLYMER ROAD BARRIER

Model No.: STDY PRB

Description:

High impact resistant polymer, a terrific alternate to concrete barrier wall, no end
treatment required, no maintenance as vehicles tend to give the road barrier a
wide berth, will not rust, chip, bend or peel, does not allow errant vehicles to
enter work area while at the same time redirects traffic back onto the road
reducing injury to the driver, highly visible in work areas, colored interlocking
sections in orange and white.

Modular design allows you to choose the length required, easy to use and handle, does not require cranes as in case of concrete barriers, quick and easy deployment. Requires only two people to deploy. Provisions are provided for warning lights / fog lights / flashers etc.

Safe exterior as there are no sharp points, edges or corners. Absorbs much of the energy of a collision as the water inside takes the impact.

Also available with rechargeable solar warning light.

Origin: UAE / China



STURDY ORANGE SAFETY MESH 50M

Model No.: STDY RSM50

Description:

Material : PVCColor : OrangeLength : 50 m

• Width : 1 m
Origin : China



CAUTION CHAIN

Model No.: CCN-100

Description:

 Plastic traffic chain, in 6 mm. Material is polyethylene or nylon, as it is rust resistant and durable. It can be used for outdoor, playground and garden applications. Packing in bulk packing or roll packing. Also available in 8 mm and 10 mm; short link or long link. Colour in stock is red and white but can be provided in any two colours subject to quantity inducement.



Origin: China

WARNING TAPE

Model No.: WT-500

Description :

• Material : PVC Warning Tape

Colour : Red & White, Black & White

Length : 400 m, 500 mWidth : 72 mmThickness : 35 micron

Origin: China

CAUTION TAPE

Model No.: CT-500

Description:

Material : PVC Caution TapeColour : Yellow with black printing

Length: 300 m, 500 m
Width: 72 mm
Thickness: 90 micron

Origin : China



STURDY TRAFFIC CONE 5KG

Model No.: STDY TC 5

Description:

 The cones are made of PE, EVA, or PVC with brilliant red and white colours and UV absorbers for maximum visibility, extended life and with reflective tape. Traffic cones are deployed in sports field, hotel, bank, hospital, school, gas station, municipal government and other public place in different styles.

Height: 100 cmWeight: 5 - 6 kgOrigin: China



STURDY ROAD BOLLARD POST 74 CMS

Model No.: STDY BP-74

Description:

- A highly visible polyurethane bollard that is virtually indestructible. Bright orange finish with reflective bands for increased night visibility. Used for lane delineation or identifying hazards, particularly in night driving situations.
- · Durable one piece polyurethane moulding
- Built in reflective bandsHeight : 74 cm

Origin : China



STURDY SOLAR WARNING LIGHT II-A

Model No.: STDY SWL II-A

Description:

Warning light with metal handle, without metal bracket

Frequency : 60 ± 5 t/mColour : Amber

Origin: China



STURDY SOLAR WARNING LIGHT FOR SAFETY CONE TOP

Model No.: STDY SWL II

Description:

 The solar warning light attaches to the top of a safety cone. It flashes automatically at night and turns off automatically during the day time.
 The solar cell recharges the battery during daylight hours when in the sun.

Function : Flash, sunlight sensor, cone top cupBattery : Recharged by built-in solar panel

Lamp Type: LED 6 pcs
Length: 38.2 cm
Diameter: 19 cm
Origin: China





SECURITY TAPE

Model No.: ST-500

Description:

Material : PVC Security TapeColour : Yellow with black printing

Length : 300 m, 500 m
Width : 72 mm
Thickness : 90 micron
Origin : China / India





NAUTILUS ZHBFK IMMERSION SUITS

Model No. NTLS ZHBFK

Description:

· NAUTILUS ZHBFK immersion suit is designed and produced according to the standards of the "Safety of Life at Sea (SOLAS)"(1974), its Amendment (1996) and MSC.81 (70) entitled "Revised Recommendation on Testing of Life-saving Appliances". It is prepared for the operation persons on the ship or on the platform over the sea as a special overcoat for life-saving and thermal insulation when they are in the cold-water area or in the adverse circumstances. It is made of waterproof cloth and thermal insulation floating materials. The jacket, trousers, gloves and oil-proof boots are connected as one to cover the whole body except the face. It has the properties of floatability, waterproof and natural thermo stability. It is equipped with lifejacket light and whistle. It can be used as a lifesaving necessity without another lifejacket to put on for the people on the ship navigating at any area and platform over the sea. It has Large size and Middle size, which can be provided for people at the height of 1.75-1.9m and shorter than 1.75m separately.





NAUTILUS INFLATABLE LIFE JACKET

Model No. NTLS ZHGQYT-0511

Description:

· This inflatable Lifejacket is designed and manufactured in conformity with European Standard EN396:1993 / A1:1998 and relevant requirements of MSC.81(70). It consists of one air chamber made of TPU nylon composite material an automatic (and manual) inflation device, a CO₂ cylinder an oral tube and an outer cover. It also has a whistle attached. This lifejacket is designed to inflate automatically within five seconds when immersed in water. In an emergency situation when falling into the water, this lifejacket can also be inflated manually by pulling the toggle or by blowing in to the oral tube. Being of low volume, lightweight and ergonomically well designed and easy to use, it is convenient for use in water sports. Do not inflate the lifejacket before immersion.

Type ZHGQYT-0511 and Type ZHGQYT-0521 are CE Certified by Germanischer Lloyd AG.

Weight : ≤1 kg : >150 N Buoyancy

Angle in Water : Face plane angle ≥40°, trunk angle ≥30°

Freeboard : ≥120 mm Inflation Time : ≤5 s Float Duration : ≥24 h Buoyancy Loss after 24 h : ≤5% • CO₂ Weight : 33 g

Origin: China

NAUTILUS LIFEBUOY

Model No. NTLS LB30

Description:

· Lifebuoy, 30" dia., 2.5 kgs, C/W reflective stripes and grab line approved SOLAS '96/98, CCS, with containerized rope 30 m.

Origin: China



NAUTILUS MARINE WORK VEST 175

Model No. NTLS MWV 175

Description:

· Weight : 1 kg

: More than 7.5 kgs Buoyancy

Useful Scope: Seafarer use

for sea

Inspected and tested in compliance with SOLAS '74 and International Standard Office Amended 1983.

Origin: China



NAUTILUS MARINE LIFE JACKET 86-5

Model No. NTLS MLJ 86-5

Description:

Weight: 0.42 kg

· Buoyancy: More than 7.5 kgs

· Useful Scope : Seafarer use for sea

· Inspected and tested in compliance with SOLAS '74 and

International Standard Office Amended 1983.

Origin: China

NAUTILUS MARINE LIFE JACKET 5564-1

Model No. NTLS MLJ 5564-1

Description:

· Weight : 0.70 kg

: More than 11 kgs Buoyancy • Useful Scope : Seafarer use for sea

Inspected and tested in compliance with SOLAS '74 and International Standard Office Amended 1983.

Origin: China

30





NAUTILUS - MARK HAWK (DESCENDER DEVICE)







Description:

- · Automatic and controlled descent of 1 person
- · Efficient rescue of several persons using the shuttle system
- · Eye-bolts to control the descent
- · Maintenance-free for 10 years when stored in Seal-Pack
- For varying descent heights, NAUTILUS MARK Hawk is available in combination with the KONG Duck rope clamp.
- Standard : EN 341:2011–1B
 Load-bearing Capacity : 150 kg (1 person)
- Max. Decent Height : 300 mMaterial : Steel
- · Braking System: Automatic, redundant brake system, 2 fly
 - wheel brakes, brake drums made from
 - stee
- Karabiner : Aluminium screw carabiner (others upon
 - request)
- EN 1891-A ø 9,6 mm
- Check Interval : 2.000 m or once a year (when stored in

: Static polyamide kernmantle rope acc. to

- Seal-Pack inspection is required every 10 years)
- Period of Use : Device unlimited, rope max. 10 years
- Applications : For fast evacuation from workplaces at
 - heiaht

Origin: Austria

Rope

NAUTILUS - CONFINED SPACES RESCUE

Model No. NTLS 8000 - TRIPOD

Description:

- · For access in confined space
- Adjustable Aluminium Telescopic legs
- · Two auxiliary bolts and mounted pulleys as attachment points
- · Aluminium alloy cast head
- · Anti slip rubber shoes provided for stability
- Strength greater than 10 kN
- For telescopic legs holding at base provided adjustable polyamide webbing Lifepod is having an adjustable height of 1.5 mtrs. to 2.15 mtrs.
- The maximum bottom diameter is 1.8 2 mtrs.
- Weight: 15 kg
- · Lifepod bag also available
- CE certified as per EN 795 class B

Origin: India



NAUTILUS RESCUE TRIANGLE



Description:

- · NAUTILUS Rescue Triangle can be used in two sizes
- Material : PolyesterStandard : EN 1498-B

Origin: Austria

NAUTILUS RESCUE POLE

Description:

- · Aluminium telescope pole to clip carabiners from distance
- · Fits for AHK and Cobra carabiners
- · Extendible from 83 to 366 cm

Origin: Austria



NAUTILUS - RESCUE WINCH

Model No. NTLS 8001

Description:

- To be used for raising or lowering of personnel or material into confined spaces. Equipped with bolting fixture for robust fitting on to the tripod.
- Uses: To be used with a Retractable Fall Arrester when deployed for raising or lowering a person.
- Weight : 9 kgsLifting Load Capacity : 125 kgsLength : 20.0 m
- Conforms to EN ISO 1412-1, 2, 1496 (Class B)

Origin: India



NAUTILUS - MARK ELEPHANT

(DESCENDER AND RESCUE DEVICE WITH HIGH LOAD CAPACITY)





Description:

- · Automatic and controlled descent of 2 persons
- · Eye-bolts and rope clamp to control or stop the descent
- · Maintenance-free for 10 years when stored in Seal-Pack
- For varying descent heights, NAUTILUS MARK Elephant is available in combination with the KONG Duck rope clamp
- Standard : EN 341:2011-1A
 Load-bearing Capacity : 225 kg (2 persons)
- Descent : Ca. 0.8 m/sec (independent of descend load)
- Max. Decent Height : 300 m
 Material : Aluminium, Steel
- Braking System : Automatic, redundant brake system, 2 fly wheel

brakes, brake drums made from steel

- Karabiner : Automatic AHK aluminium carabiner (others
 - upon request)
- Rope : Static polyamide kernmantle rope acc. to EN

1891-A ø 9.6 mm

- Check Interval : 10.000 m or once a year (when stored in
 - Seal-Pack inspection is required every 10

years only)

• Period of Use : Device unlimited, rope max. 10 years

Origin : Austria

NAUTILUS - MARK ELEPHANT HUB

(DESCENDER AND RESCUE DEVICE WITH LIFTING FUNCTION)

Description:

- · Automatic and controlled descent of 2 persons
- · Hand-wheel for lifting of injured and rescuer
- · Eye-bolts and rope clamp to control or stop the descent
- · Lifting longer distances with battery screw driver
- · Maintenance-free for 10 years when stored in Seal-Pack
- Different handwheels available (with spoke, closed, foldable handle)
- · Hexagon connector for battery screw driver as standard
- For varying descent heights, MARK Elephant is available in combination with the KONG Duck rope clamp
- Standard : EN 341:2011-1A
 Load-bearing Capacity : 225 kg (2 persons)
- Descent : Ca. 0.8 m/sec (independent of descend load)
- Max. Decent Height : 300 mMaterial : Aluminium, Steel
- Braking System : Automatic, redundant brake system, 2 fly

wheel brakes, brake drums made from steel

Karabiner : Automatic AHK aluminium carabiner (others

upon request)

Rope : Static polyamide kernmantle rope acc. to EN

1891-A ø 9.6 mm

• Check Interval : 10.000 m or once a year (when stored in

Seal-Pack inspection is required every 10

years only)

· Period of Use : Device unlimited, rope max. 10 years

 Applications : For height rescue by fire fighters, cable cars, industrial alimbers, outdoor parks, when

industrial climbers, outdoor parks, when working at great heights and for efficient rescue of many people (2 people can be lowered or lifted at the same time)

Origin: Austria







NAUTILUS - MARK GEKKO (ANCHOR POINT)

Description:

 NAUTILUS MARK GEKKO is delivered with the appropriate screws for the respective underground.

Standard : EN 795-A

Load-bearing Capacity: Max. 150 kg (1 person)
 Dimensions : 95 mm x 50 mm x 14 mm

Screw Distance : 38 mm

Position : On horizontal and vertical surfaces overhead

position possible in concrete

• Material : Stainless Steel 1.4301 A2

• Features : Flat Shape, buckle acts as energy absorber and

fall indicator, screws for the respective material

included

• Inspection : Check free movement of the buckle, no test loads

required


Use Cases : Ideal for the installation of access - and fall

protection in windows, buildings and industry

Origin: Austria









STURDY SPILL KIT - CHEMICAL - 20 Ltr.

Model No.: STDY SKC-20

Description:

Sorbent Pad

UEP100-Y-15"x17" : 15 pcs

· Sorbent Sock

HAZSOC30-Y-3"x4ft : 2 pcs

HD Disposal Bag Safety Goggle 1 pc 1 pc

Nitrile Glove : 1 pairPlastic Scoop & Brush : 1 pc

• Spill Kit Label : 1 pc • Spill Kit Bag : 1 pc

• Instruction Sheet : 1 pc





STURDY SPILL KIT - CHEMICAL - 50 Ltr.

Model No.: STDY SKC-50

Description:

Sorbent Pad

UEP100-Y-15"x17" : 35 pcs

· Sorbent Sock

HAZSOC30-Y-3"x4ft : 3 pcs

• HD Disposal Bag : 1 pc

• Safety Goggle : 1 pc

Nitrile Glove : 1 pairPlastic Scoop & Brush : 1 pc

Spill Kit Label : 1 pcSpill Kit Bag : 1 pc

• Instruction Sheet : 1 pc

Origin: USA



STURDY SPILL KIT - CHEMICAL - 80 Ltr.

Model No.: STDY SKC-80

Description:

· Sorbent Pad

UEP100-Y-15"x17" : 50 pcs

· Sorbent Sock

HAZSOC30-Y-3"x4ft : 4 pcs

· Sorbent Pillow

HAZPIL818-Y-8"x18" : 2 pcs

• HD Disposal Bag : 2 pcs

• Safety Goggle : 1 pc

• Nitrile Glove : 1 pair

Plastic Scoop & Brush : 1 pc

Spill Kit LabelSpill Kit Bin

without Wheel : 1 pc

• Instruction Sheet : 1 pc

Origin: USA



STURDY SPILL KIT - CHEMICAL - 100 Ltr.

Model No.: STDY SKC-100

Description:

· Sorbent Pad

UEP100-Y-15"x17" : 70 pcs

· Sorbent Sock

HAZSOC30-Y-3"x4ft : 4 pcs

· Sorbent Pillow

HAZPIL818-Y-8"x18" : 4 pcs

• HD Disposal Bag : 2 pcs

• Safety Goggle : 1 pc

Nitrile Glove : 1 pairPlastic Scoop & Brush : 1 pc

• Spill Kit Label : 1 pc

Spill Kit Bin with Wheel: 1 pc

• Instruction Sheet : 1 pc

Origin: USA



STURDY SPILL KIT - CHEMICAL - 120 Ltr.

: 1 pc

Model No.: STDY SKC-120

Description:• Sorbent Pad

UEP100-Y-15"x17" : 75 pcs

Sorbent Sock

HAZSOC30-Y-3"x4ft : 5 pcs

· Sorbent Pillow

HAZPIL818-Y-8"x18" : 4 pcs

• HD Disposal Bag : 3 pcs

• Safety Goggle : 1 pc

• Nitrile Glove : 1 pair

• Plastic Scoop & Brush : 1 pc

• Spill Kit Label : 1 pc

· Spill Kit Bin with Wheel: 1 pc

• Instruction Sheet : 1 pc

Origin: USA



STURDY SPILL KIT - CHEMICAL - 240 Ltr.

Model No.: STDY SKC-240

Description:

Sorbent Pad

UEP100-Y-15"x17" : 150 pcs

Sorbent Sock

HAZSOC30-Y-3"x4ft : 10 pcs

Sorbent Pillow

HAZPIL818-Y-8"x18" : 8 pcs

• HD Disposal Bag : 4 pcs

• Safety Goggle : 1 pc

Nitrile Glove : 1 pair

Plastic Scoop & Brush : 1 pcSpill Kit Label : 1 pc

Spill Kit Bin with Wheel: 1 pc

• Instruction Sheet : 1 pc





STURDY SPILL KIT WITH GRANULES & SHOVEL - CHEMICAL - 120 Ltr.

Model No.: STDY SKC-120GS

Description:

· Sorbent Pad

UEP100-Y-15"x17" : 75 pcs

Sorbent Sock

HAZSOC30-Y-3"x4ft : 5 pcs

Sorbent Pillow

HAZPIL818-Y-8"x18" : 4 pcs

· Granules,

Gorillazorb 11.2 Kg : 1 bag · HD Disposal Bag : 3 pcs

· Safety Goggle : 1 pc · Nitrile Glove : 1 pair

· Non-Sparking Shovel : 1 pc · Spill Kit Label : 1 pc

· Spill Kit Bin with Wheel: 1 pc · Instruction Sheet : 1 pc

Origin: USA



STURDY SPILL KIT - CHEMICAL

Model No.: STDY SKC-500-1100 (Capacity 500 Ltr. upto 1100 Ltr.)

Description:

Sorbent Pads,

UEP100-Y : 15"x17"

Sorbent Sock,

HAZSOC8-Y : 3"x8ft

Sorbent Pillow,

HAZPIL1816-Y : 18"x18"

· Sorbent Roll, BESR144: 15"x150ft

Granules, GRANSORB : 13.6 Kg/Bag

· Safety Goggles

· Nitrile Gloves

· HD Disposal Bag

Spill Kit Label

· Spill Kit Container with 4 Wheel

· Instruction Sheet

Origin: USA

Remark: Sorbent quantity based on capacity of kit.

STURDY SPILL KIT - OIL - 50 Ltr.

Model No.: STDY SKO-50

Description:

· Sorbent Pad

EP100-15"x17" : 35 pcs

· Sorbent Sock

PS30-3"x4ft : 3 pcs · HD Disposal Bag : 1 pc

· Safety Goggle : 1 pc · Nitrile Glove

: 1 pair • Plastic Scoop & Brush: 1 pc

· Spill Kit Label : 1 pc

· Spill Kit Bag : 1 pc

 Instruction Sheet : 1 pc

Origin: USA



CAUTION

STURDY SPILL KIT WITH GRANULES & SHOVEL - CHEMICAL - 240 Ltr.

Model No.: STDY SKC-240GS

Description:

· Sorbent Pad

UEP100-Y-15"x17" : 150 pcs

Sorbent Sock

HAZSOC30-Y-3"x4ft : 10 pcs

Sorbent Pillow

HAZPIL818-Y-8"x18" : 8 pcs

· Granules,

Gorillazorb 11.2 Kg : 1 bag

· HD Disposal Bag : 4 pcs · Safety Goggle : 1 pc

· Nitrile Glove : 1 pair

· Non-Sparking Shovel : 1 pc · Spill Kit Label : 1 pc

· Spill Kit Bin with Wheel: 1 pc · Instruction Sheet : 1 pc



Origin: USA

STURDY SPILL KIT - OIL - 20 Ltr.

Model No.: STDY SKO-20

Description:

Sorbent Pad

EP100-15"x17" : 15 pcs

Sorbent Sock

PS30-3"x4ft : 2 pcs · HD Disposal Bag : 1 pc

· Safety Goggle : 1 pc · Nitrile Glove : 1 pair

• Plastic Scoop & Brush: 1 pc · Spill Kit Label : 1 pc · Spill Kit Bag : 1 pc

· Instruction Sheet : 1 pc







STURDY SPILL KIT - OIL - 80 Ltr.

Model No.: STDY SKO-80

Description:

- Sorbent Pad EP100-15"x17" : 50 pcs Sorbent Sock PS30-3"x4ft : 4 pcs
- Sorbent Pillow, PIL818,8"x18" : 2 pcs HD Disposal Bag : 2 pcs Safety Goggle : 1 pc
- Nitrile Glove : 1 pair Plastic Scoop & Brush: 1 pc Spill Kit Label
- : 1 pc Spill Kit Bin





Origin: USA

STURDY SPILL KIT - OIL - 120 Ltr.

: 5 pcs

: 1 pc

Model No.: STDY SKO-120

Description:

- Sorbent Pad
- EP100-15"x17" : 75 pcs Sorbent Sock
- PS30-3"x4ft Sorbent Pillow.
- : 4 pcs PIL818,8"x18" : 3 pcs HD Disposal Bag
- Safety Goggle
- Nitrile Glove : 1 pair Plastic Scoop & Brush: 1 pc
- Spill Kit Label : 1 pc Spill Kit Bin with Wheel: 1 pc
- Instruction Sheet : 1 pc



Origin: USA

STURDY SPILL KIT WITH GRANULES & SHOVEL - OIL - 120 Ltr.

Model No.: STDY SKO-120GS

Description:

- Sorbent Pad
- EP100-15"x17" : 75 pcs Sorbent Sock
- PS30-3"x4ft : 5 pcs Sorbent Pillow.
- PIL818,8"x18" : 4 pcs
- Granules. Gorillazorb 11.2 Kg : 1 bag
- HD Disposal Bag : 3 pcs
- Safety Goggle : 1 pc Nitrile Glove : 1 pair
- Non-Sparking Shovel : 1 pc Snill Kit Label : 1 pc
- Spill Kit Bin with Wheel: 1 pc Instruction Sheet : 1 pc



Origin: USA

STURDY SPILL KIT - OIL

Model No.: STDY SKO-500-1100 (Capacity 500 Ltr. upto 1100 Ltr.)

Description:

- Sorbent Pads, EP100 : 15"x17" Sorbent Sock, PS8 : 3"x8ft Sorbent Pillow, PIL1816: 18"x18"
- Sorbent Roll, BESR144: 15"x150ft Granules, GRANSORB: 13.6 Kg/Bag
- Safety Goggles
- Nitrile Gloves
- HD Disposal Bag
- Spill Kit Label
- Spill Kit Container with 4 Wheel
- Instruction Sheet

Remark: Sorbent quantity based on capacity of kit.

STURDY SPILL KIT - OIL - 100 Ltr.

: 4 pcs

Model No.: STDY SKO-100

Description:

- Sorbent Pad EP100-15"x17" : 70 pcs
- Sorbent Sock
- PS30-3"x4ft Sorbent Pillow.
- PIL818,8"x18" : 4 pcs
- HD Disposal Bag 2 pcs Safety Goggle : 1 pc
- Nitrile Glove : 1 pair Plastic Scoop & Brush : 1 pc
- Spill Kit Label : 1 pc Spill Kit Bin with Wheel: 1 pc
- Instruction Sheet : 1 pc

Origin: USA

STURDY SPILL KIT - OIL - 240 Ltr.

Model No.: STDY SKO-240

Description:

- Sorbent Pad
- EP100-15"x17" : 150 pcs Sorbent Sock
- PS30-3"x4ft
- : 10 pcs Sorbent Pillow.
- PILL818,8"x18' : 8 pcs
- HD Disposal Bag : 4 pcs
- Safety Goggle : 1 pc Nitrile Glove : 1 pair
- Plastic Scoop & Brush: 1 pc
- Spill Kit Label : 1 pc Spill Kit Bin with Wheel: 1 pc
- Instruction Sheet : 1 pc

Origin: USA

STURDY SPILL KIT WITH GRANULES & SHOVEL - OIL - 240 Ltr.

Model No.: STDY SKO-240GS

Description:

- Sorbent Pad
- EP100-15"x17" : 150 pcs
- Sorbent Sock PS30-3"x4ft : 10 pcs
- Sorbent Pillow,
- PILL818,8"x18" : 8 pcs
- Granules. Gorillazorb 11.2 Kg : 1 bag
- HD Disposal Bag : 4 pcs Safety Goggle : 1 pc Nitrile Glove : 1 pair
- Non-Sparking Shovel : 1 pc Spill Kit Label : 1 pc
- Spill Kit Bin with Wheel: 1 pc Instruction Sheet : 1 pc



Origin: USA

STURDY SPILL KIT - UNIVERSAL

Model No.: STDY SKU-500-1100 (Capacity 500 Ltr. upto 1100 Ltr.)

Description:

- Sorbent Pads, UQEP100 : 15"x17" : 3"x8ft Sorbent Sock, GS8 Sorbent Pillow, GPIL1816: 18"x18" Sorbent Roll, BESR144 : 15"x150ft
- Granules, GRANSORB : 13.6 Kg/Bag
- Safety Goggles
- Nitrile Gloves HD Disposal Bag
- Spill Kit Label
- Spill Kit Container with 4 Wheel
- Instruction Sheet

Origin: USA

Remark: Sorbent quantity based on capacity of kit.



STURDY SPILL PALLETS











STDY 1001

STDY 1002

STDY 1006

STDY 1050

STDY 1051











STDY 3001



STDY 4001



STDY 4001







STDY 5005



STDY 5101 / 5103



STDY 5201



STDY 6001-P & STDY 6101







STDY BS50-COYE



STDY DSP-2



STDY DSP-4



STDY ST1-20



STDY ST1-20-B-BK



STURDY SORBENT MELTBLOWN PAD - OIL

Model No.: STDY EP-100

Description:

- STURDY has a variety of oil sorbents for all your industrial maintenance needs!
- Sturdy pure meltblown polypropylene fibers are the most cost today
- Fast-wicking fibers absorb up to 25 times their weight in hydrocarbon
- · These durable, medium weight
- · Ideal when you have to clean up oily spills or
- Great for when you don't need the extra absorbency or expense of a universal absorbent
- · Product sold by net weight
- Pad counts are approximate

Origin: USA

STURDY SORBENT BOOMS (POLYPROPYLENE) - 01

Model No.: STDY B510

Description:

 The choice product of spill contractors for decades, STDY 5" and 8" oil absorbent booms are a necessity for cleaning up oil spills. In providing over 10,000,000 feet of 5" oil spill absorbent boom (B510) during the Gulf Oil Spill Crisis in 2010, STDY 5" became the standardized product across the



- became the standardized product across the oil spill clean-up industry.
- Provides containment & maximum adsorption while repelling water
 Absorbs oil on land or water even when raining
- Will not sink even if the boom is saturated
- · Comprised of anti-shed or non-lint netting
- Overlapping clips for deployment in any length
- Embedded rope for easy deployment and retrieval in water
- Ideal uses include wastewater troughs, loading docks, ponds, rivers, and oceans to absorb oily spills

Origin: USA

STURDY HAZMAT SORBENT SOCK - CHEMICAL

Model No.: STDY HAZSOC30-Y

Description :

 STDY's universal haz mat line of booms, pillows, and socks are ideal for containing and absorbing spills of any liquid!



- · An absolute necessity for any haz mat spill or spill contingency plan
- · Contain drips and leaks absorbing any liquid.
- · Socks and booms come in a variety of sizes
- · All products are color coded in haz mat orange
- · Absorbs up to 25 times their weight in fluid

Origin: USA

STURDY SORBENT PILLOW - OIL

Model No.: STDY PIL-1816

Description:

 Get more bang for the buck with STDY's high adsorption pillows. Just throw them out and watch them absorb a ton of petroleum and then float for easy retrieval!



- Pillows are ideal for oil spill control, spill containment, oil spill clean-up and skimming oil from water
- · Works great for catch basins, sumps, leaking machinery, etc.
- Heavy duty polypropylene cover resists tearing
- Use on land or water

Origin: USA

STURDY HAZMAT SORBENT PAD - CHEMICAL

Model No.: STDY UEP100-Y

Description:

- STDY's Hazmat aggressive pads (and rolls) are an absolute necessity for any haz mat spill or spill contingency plan!
- · Ideal for wiping up chemical spills.
- These pads (and rolls) will absorb all liquids from water-based fluids to aggressive acids
- · Bonded for tensile strength.
- · Absorb up to 25 times their weight in all liquids
- · Haz Mat Green color stands out as a potentially harmful liquid that spilled.
- · Quick and easy to apply.


Origin: USA

STURDY SORBENT POLY SOCK - OIL

Model No.: STDY PS-8

Description:

- STURDY's polypropylene socks are ideal for oil spill control, skimming oil off water, and for oil spill clean-up!
- Socks remove oil from troughs, vats, catch basins and sumps



- Absorbs oil from water around leaking machines exposed to rain and various other oil/water separation applications
- · Polypropylene socks are wringable for reclaiming liquids
- · Very high absorbency rate

Origin: USA

STURDY SORBENT POLY SOCK - OIL

Model No.: STDY PS-30

Description:

- STURDY's polypropylene socks are ideal for oil spill control, skimming oil off water, and for oil spill clean-up!
- Socks remove oil from troughs, vats, catch basins and sumps
- Can be used indoors or out and will not absorb water
- Absorbs oil from water around leaking machines exposed to rain and various other oil/water separation applications
- Polypropylene socks are wringable for reclaiming liquids
- · Very high absorbency rate

Origin: USA

STURDY SORBENT PILLOW - OIL

Model No.: STDY PIL-818

Description :

 STDY's oil bonded rolls are ideal for wiping applications where increased tensile strength is necessary. The sonic bonding



process creates a stronger more durable fiber without affecting absorption!

- Sturdy pure meltblown polypropylene fibers are the most cost-effective absorption technology today
- Fast-wicking fibers absorb up to 25 times their weight in hydrocarbon
- These durable, heavy-weight bonded rolls absorb petroleum-based liquids, but never water
- Ideal when you have to clean up oily spills or drips
- Great for when you don't need the extra absorbency or expense of a universal absorbent



STURDY SORBENT BOOMS (POLYPROPYLENE) - OIL

Model No.: STDY B810

Description:

· The choice product of spill contractors for decades, STDY 8" oil absorbent booms are a necessity for cleaning up oil spills. Provides containment & maximum absorption while repelling water.



- · Provides containment & maximum adsorption while repelling water
- Absorbs oil on land or water even when raining
- · Will not sink even if the boom is saturated
- · Comprised of anti-shed or non-lint netting
- · Overlapping clips for deployment in any length
- · Embedded rope for easy deployment and retrieval in water
- Ideal uses include wastewater troughs, loading docks, ponds, rivers, and oceans to absorb oily spills

Origin: USA

STURDY HAZMAT SORBENT PILLOW

Model No.: STDY HAZPIL1816-Y

Description:

- · STDY's universal haz mat line of booms, pillows, and socks are ideal for containing and absorbing spills of any liquid!
- · An absolute necessity for any haz mat spill or spill contingency plan
- Contain drips and leaks absorbing any liquid.
- Socks and booms come in a variety of sizes
- All products are color coded in haz mat orange
- · Absorbs up to 25 times their weight in fluid

Origin: USA

STURDY SORBENT PAD - UNIVERSA

Model No.: STDY UQEP100-NB

Description:

- · The combination of ultrasonic bonding (dimples) and outer layers creates tensile strength ideal for wiping and MRO applications. The universal grey color camouflages oil and grease!
- · Control oversprays and spills with excellent absorbency
- · Keep floors clean, dry, and safe
- · Grunge hiding grey for universal applications
- · Pads & rolls have ultrasonic weld points to keep them fully Intact
- Pads & rolls are made of meltblown polypropylene fibers
- Dimpled for added strength

Origin: USA

STURDY HAZMAT SORBENT SOCK - CHEN

Model No.: STDY HAZSOC8-Y

Description:

- STDY's Hazmat aggressive socks are an absolute necessity for any haz mat spill or spill contingency plan!
- An absolute necessity for any hazmat spill or spill contingency plan
- · HazMat socks are great for soaking up aggressive acids, bases and chemicals.
- · STDY Socks help surround spills offering easy containment and clean up.
- · Tough skin deters tearing and offers maximum flexibility.
- Socks and booms come in a variety of sizes
- All products are color coded in haz mat orange
- · Absorbs up to 25 times their weight in fluid

Origin: USA

STURDY HAZMAT SORBENT PILLOW

Model No.: STDY HAZPIL818-Y

Description:

- STDY's universal haz mat line of booms, pillows, and socks are ideal for containing and absorbing spills of any liquid!
- An absolute necessity for any haz mat spill or spill contingency plan
- · Contain drips and leaks absorbing any liquid.
- · Socks and booms come in a variety of sizes
- · All products are color coded in haz mat orange
- · Absorbs up to 25 times their weight in fluid

Origin: USA

STURDY SORBENT PILLOW - UNIVERSAL

Model No.: STDY GPIL-818

Description:

- · Featuring a grime-concealing grey color, these pillows can be placed anywhere to contain and absorb drips and spills!
- Pillow absorbs oils, water coolants and solvents
- Perfect mouldable application for continuous maintenance leaks
- The recycled fiber fillers are BTU rich for multiple disposal options
- · No Messy Clean-up!

Origin: USA

STURDY SORBENT PILLOW - UNIVERSA

Model No.: STDY GPILL-1816

Description:

- · Featuring a grime-concealing grey color, these absorbent socks fit around the base of machines to contain and absorb spills!
- Pillow absorbs oils, water coolants and solvents
- · Perfect mouldable application for continuous maintenance leaks
- · The recycled fiber fillers are BTU rich for multiple disposal options

Origin: USA

STURDY SORBENT SOCK - UNIVERSA

Model No.: STDY GS8

Description:

- · Featuring a grime-concealing grey color, these absorbent socks fit around the base of machines to contain and absorb spills!
- · Sock absorbs oil, water, coolants and solvents.
- The GS sock series ranges from 4' to 10' in length
- · Perfect mouldable application for continuous maintenance leaks
- · The recycled fiber fillers are BTU rich for multiple disposal options
- · No messy clean-up product is self-containing

Origin: USA

STURDY SORBENT SOCK - UNIVERSAL

Model No.: STDY GS30

Description:

- · Featuring a grime-concealing grey color, these absorbent socks fit around the base of machines to contain and absorb spills!
- · Sock absorbs oil, water, coolants and solvents.
- The GS sock series ranges from 4' to 10' in length
- Perfect mouldable application for continuous maintenance leaks
- The recycled fiber fillers are BTU rich for multiple disposal options
- No messy clean-up product is self-containing









Lockout Tagout (LOTO) is a safety procedure used in industry and research settings to ensure that dangerous machines are properly shut off and not able to be started up again prior to the completion of maintenance or repair work. It requires that hazardous energy sources be "isolated and rendered inoperative" before work is started on the equipment in question. The isolated power sources are then locked and a tag is placed on the lock identifying the worker who placed it. The worker then holds the key for the lock, ensuring that only he or she can remove the lock and start the machine. This prevents accidental startup of a machine while it is in a hazardous state or while a worker is in direct contact with it.

Lockout Tagout is used across industries as a safe method of working on hazardous equipment and is mandated by law in some countries.





LOCKOUT HASP | MULTIPURPOSE CABLE LOCKOUT | VALVE LOCKOUT | CYLINDER LOCKOUT | PNEUMATIC LOCKOUT | PLUG LOCKOUT | PIN & SLEEVE PLUG / SOCKET LOCKOUT | CIRCUIT BREAKER LOCKOUT





CIRCUIT BREAKER LOCKOUT | FUSE LOCKOUT | ELECTRICAL PANEL LOCKOUT LOCKOUT SAFETY PADLOCK | OPEN LOCKOUT STATION | SHADOW LOCKOUT STATION





LOCKOUT TAGOUT STATION | GROUP LOCK BOXES | LOCKOUT TAGS | LOCKOUT KITS | LOCKOUT SIGNS & LABELS | LOCKOUT ACCESSORIES SCAFFOLDING TAGS / ASSET MANAGEMENT TAGS & TAG HOLDERS | SHADOW LOCKOUT STATION | LOCKOUT POSTERS



NTLS WM-S-SLB-5K

NTLS PS-GLMBW

NTLS YB-SLTS-16

NTLS CLP-24

NTLS CLP-26





NAUTILUS Safety Awareness and Training Division provides users in the safe and efficient selection, application and use of the apparatus and also trains Safety Personnel in the periodical supervisory inspection of such devices to ensure timely replacement of unsafe or inefficient equipment.

The Company provides 'Head to Toe' Training in 'Safety Awareness' with special emphasis on Fall Arrest (Working at Height) and LOTO (Lockout and Tagout).

This includes instruction in the inspection before use and periodic inspection of Helmets (Hard Hats) Safety Harness, confined space equipment, Respirators and Masks, Sound Attenuation Devices (Ear Plugs, Ear Muffs etc.), Selection of proper PPE and care.







AWARENESS & TRAINING PROVIDED FOR:

- General Safety Awareness
- Work at Height
- Respiratory Protection
- Confined Spaces
- Rescue from Height & Tower Cranes
- Hand Protection

- Ladder & Scaffolding Safety
- Eye & Head Protection
- Electrical Hazards & Welding Safety
- Fire Fighting & Evacuation
- Preventing Slips, Trips & Falls
- Rope Applications

LOTO SURVEY & PROCEDURES:

- Site Surveys
- Identify the equipment and provide solution
- Provide Survey Reports for suggested products and quantity
- LOTO Training about Guidelines, Procedures, Products Knowledge & Practical use of LOTO products.





MIDDLE EAST, C.I.S. & AFRICA

Caribbean Shipchandlers Est.

Dubai, U.A.E. Fax : +971 6 533 6553

NORTH AMERICA

Nautilus North America Director - Americas :

Director - North America :

Ms. Zahra Raney
Email : safety@nautilusweb.com
Web. : www.nautilusweb.com
Cell : +1 701 200 8080

SINGAPORE Nautilus Singapore

Managing Director :
Capt. S.N. Kapoor
Tel. : +65 6443 0077
Fax : +65 6448 6642
Web. : www.nautllusweb.com

CENTRAL & SOUTH AMERICA

Nautilus International Cayman Ltd.

P.O. Box : 30739, Cassia Court, Camana Bay, Grand Cayman, KY1-1203, Cayman Islands, British West Indies

E-mail : safety@nautilusweb.com Web. : www.nautilusweb.com

ASIA

Nautilus Maritime Company Private Limited

Mr. Bhasskar Modi
Cell : +91 98 3310 8160
E-mail : nauthlusin@nautilusweb.com
Web. : www.nautilusweb.com
Tel. : +91 22 2284 0878 / 1629
Fax : +91 22 2282 5160

SAFETY SOLUTIONS UNDER ONE ROOF

































